


Type 054V.

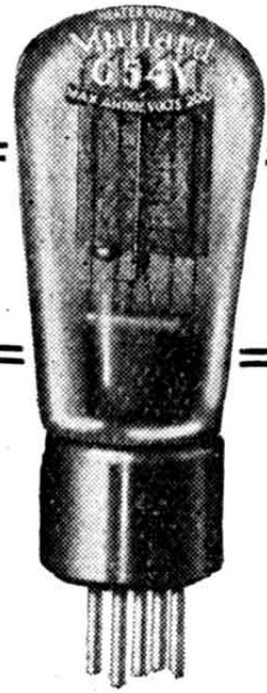

INDIRECTLY HEATED OUTPUT VALVE

Price 20/-
(In I.F.S. 22/-)

Application.


Output valve in A.C. all-mains receivers.

Characteristics.

- *Anode Impedance 1,250 ohms
- *Amplification Factor 5
- *Mutual Conductance 4.0 mA./volt
- *At Anode Volts 100 ; Grid Volts, Zero.

Operating Data.

- Max. Heater Voltage 4.0 volts
- Heater Current 1.0 amp.
- Max. Anode Voltage 200 volts

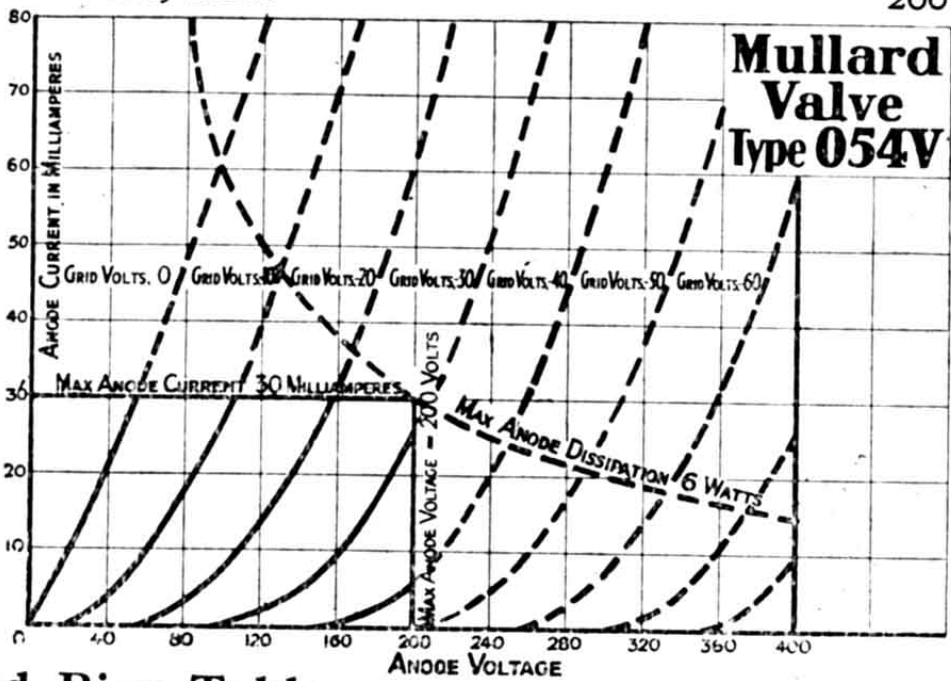

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	14.0	20.0
150	18.0	30.0
200	28.0	30.0

Mullard the Master Valve