

Type 104V.

INDIRECTLY HEATED LOW IMPEDANCE VALVE

Price 17/6
(In I.F.S. 19/3)

Application.


Small power output valve in A.C. all-mains receivers having no previous low frequency stage.

Characteristics.

- *Anode Impedance 2,850 ohms
- *Amplification Factor 10
- *Mutual Conductance 3.5 mA./volt
- *At Anode Volts 100; Grid Volts, Zero.

Operating Data.

- Max. Heater Voltage 4.0 volts
- Heater Current 1.0 amp.
- Max. Anode Voltage 200 volts

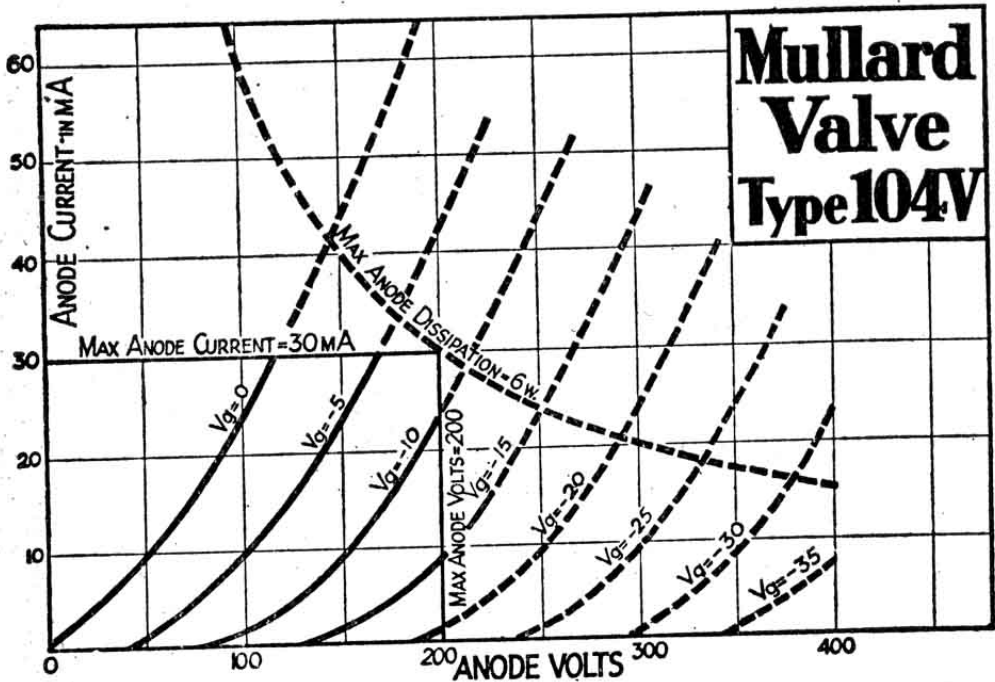

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	5.0	9.0
150	8.5	13.0
200	12.0	17.0

Mullard the Master Valve