

2D.2



DOUBLE-DIODE DETECTOR

OPERATING DATA.

Heater Voltage	2.0 V.
Heater Current	0.09 A.
Max. Diode Voltage	125 V.
Max. Diode Current	0.5 mA.

BASE.


Standard 5-pin. For connections see page 109.

BULB FINISH.

This valve is supplied with metallised bulb only.

APPLICATION.

The 2D2 is an indirectly heated double-diode valve. The two diode Anodes surrounding a common cathode. One diode is intended to be used as speech rectifier and the other can be used for the application of delayed A.V.C.

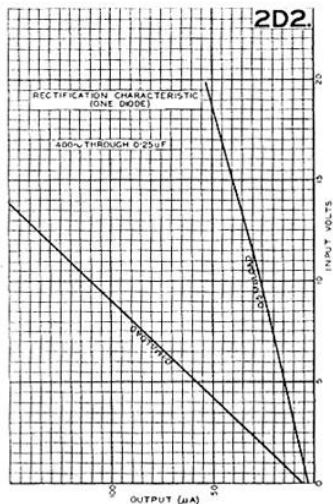

PRICE 5/6