


Characteristics of OSRAM VALVES. TYPE D.E.5.A.

DULL EMITTER.

Last Stage Power Amplifying Valve.
(For use with 6-volt Accumulators).

ANODE CURRENT/GRID VOLTS CHARACTERISTIC.

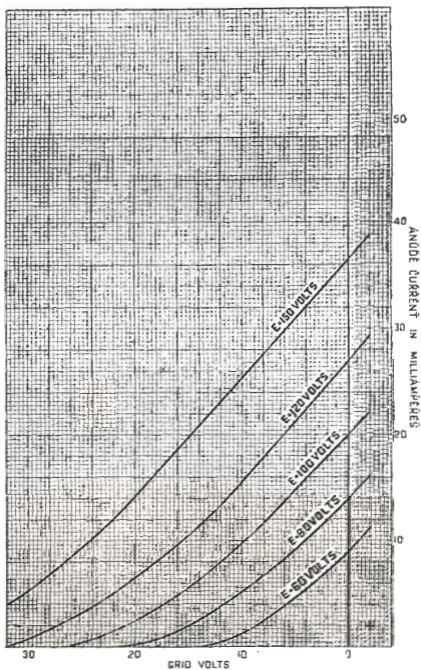

Filament Volts	5-6.
Filament Current	0.25 amps.
Anode Volts	60-120.
Impedance	4,000 ohms.
Amplification Factor	3.5.