



6DR7

6DR7

DUAL TRIODE

With High-Mu Unit and Low-Mu Unit

9-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathodes:

Voltage.	6.3 ± 10%	ac or dc volts
Current.	0.9	amp

Direct Interelectrode Capacitances (Approx.):^o

	Unit No. 1	Unit No. 2	
Grid to plate.	4.5	8.5	μμf
Grid to cathode and heater . . .	2.2	5.5	μμf
Plate to cathode and heater. . .	0.34	1	μμf


Characteristics, Class A₁ Amplifier:

	Unit No. 1	Unit No. 2	
Plate Voltage.	250	150	volts
Grid Voltage	-3	-17.5	volts
Amplification Factor	68	6	
Plate Resistance (Approx.)	40000	925	ohms
Transconductance	1600	6500	μmhos
Plate Current.	1.4	35	ma
Plate Current for plate volts = 60 and grid volts = 0	-	80	ma
Plate Current for grid volts = -24. .	-	10	ma
Grid Voltage (Approx.) for plate μa = 10.	-5.5	-	volts
Grid Voltage (Approx.) for plate μa = 50.	-	-44	volts

Mechanical:

Operating Position	Any
Maximum Overall Length	2-5/8"
Maximum Seated Length.	2-3/8"
Length, Base Seat to Bulb Top (Excluding tip)	2" ± 3/32"
Diameter	0.750" to 0.875"
Dimensional Outline.	See General Section
Bulb	T6-1/2
Base	Small-Button Noval 9-Pin (JEDEC No. E9-1)	
Basing Designation for BOTTOM VIEW	9HF

- Pin 1 - Plate of Unit No. 2
- Pin 2 - Grid of Unit No. 2
- Pin 3 - Grid of Unit No. 2
- Pin 4 - Heater
- Pin 5 - Heater



- Pin 6 - Plate of Unit No. 1
- Pin 7 - Grid of Unit No. 1
- Pin 8 - Cathode of Unit No. 1
- Pin 9 - Cathode of Unit No. 2



6DR7

DUAL TRIODE

With High-Mu Unit and Low-Mu Unit

VERTICAL-DEFLECTION OSCILLATOR

Values are for Unit No. 1

Maximum Ratings, Design-Maximum Values:

For operation in a 525-line, 30-frame system^o

DC PLATE VOLTAGE	330 max.	volts
PEAK NEGATIVE-PULSE GRID VOLTAGE	400 max.	volts
CATHODE CURRENT:		
Peak	70 max.	ma
Average.	20 max.	ma
PLATE DISSIPATION.	1 max.	watt
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode.	200 max.	volts
Heater positive with respect to cathode.	200 [■] max.	volts

Maximum Circuit Values:

Grid-Circuit Resistance:

For grid-resistor-bias or cathode-bias operation	2.2 max.	megohms
--	----------	---------

VERTICAL-DEFLECTION AMPLIFIER

Values are for Unit No. 2

Maximum Ratings, Design-Maximum Values:

For operation in a 525-line, 30-frame system^o

DC PLATE VOLTAGE	275 max.	volts
PEAK POSITIVE-PULSE PLATE VOLTAGE [#]	1500 max.	volts
PEAK NEGATIVE-PULSE GRID VOLTAGE	250 max.	volts
CATHODE CURRENT:		
Peak	175 max.	ma
Average.	50 max.	ma
PLATE DISSIPATION.	7 max.	watts
PEAK HEATER-CATHODE VOLTAGE:		
Heater negative with respect to cathode.	200 max.	volts
Heater positive with respect to cathode.	200 [■] max.	volts

Maximum Circuit Values:

Grid-Circuit Resistance:

For grid-resistor-bias or cathode-bias operation	2.2 max.	megohms
--	----------	---------

^o Without external shield.


[•] As described in "Standards of Good Engineering Practice Concerning Television Broadcast Stations," Federal Communications Commission.

[#] This rating is applicable where the duration¹ of the voltage pulse does not exceed 15 per cent of one vertical scanning cycle. In a 525-line, 30-frame system, 15 per cent of one vertical scanning cycle is 2.5 milliseconds.

[■] The dc component must not exceed 100 volts.

AVERAGE PLATE CHARACTERISTICS

Unit No.1

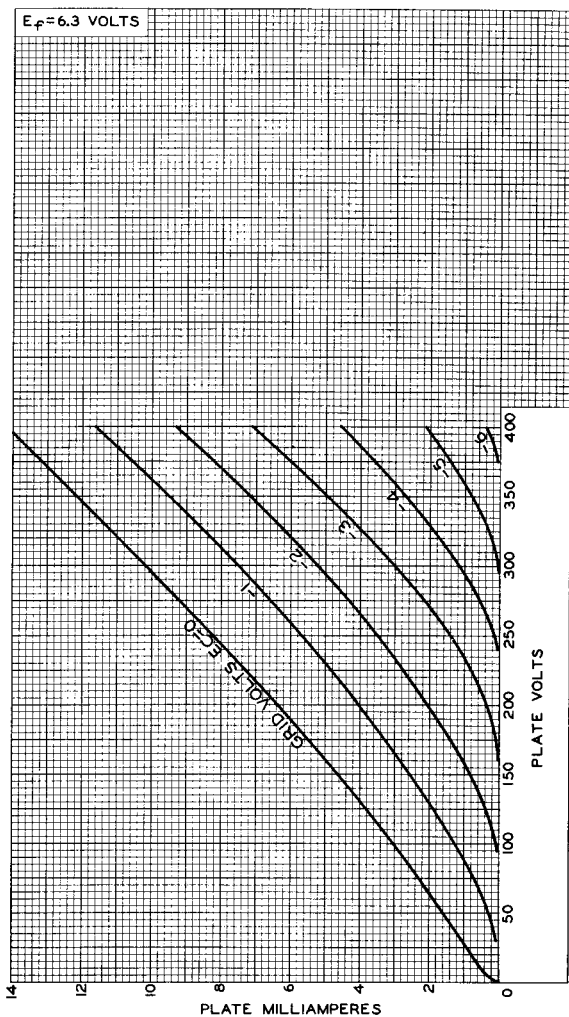


92CM-9917



6DR7

AVERAGE CHARACTERISTICS Unit No.1

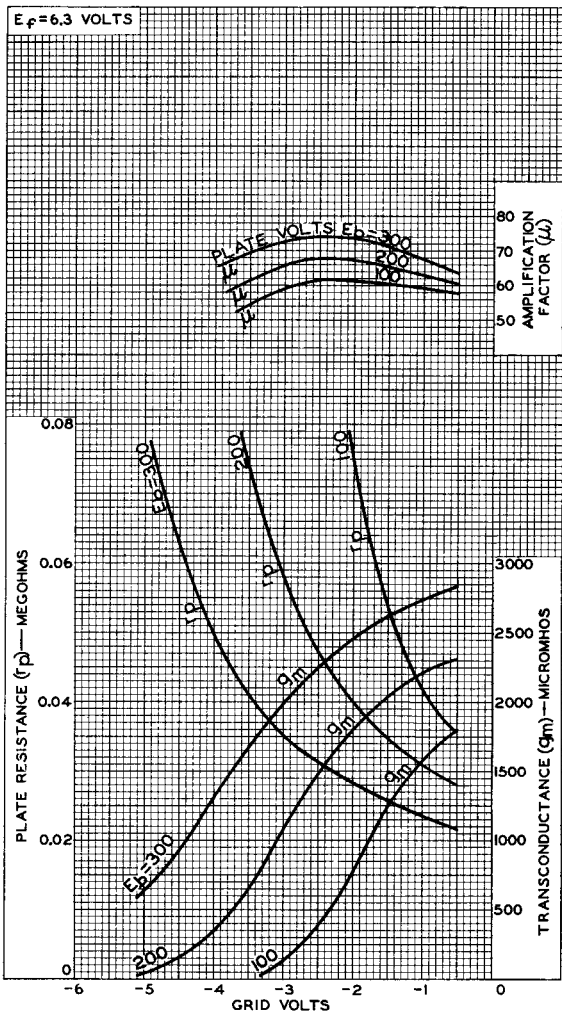

92CM-9915RI





6DR7

6DR7

AVERAGE PLATE CHARACTERISTICS UNIT No 2

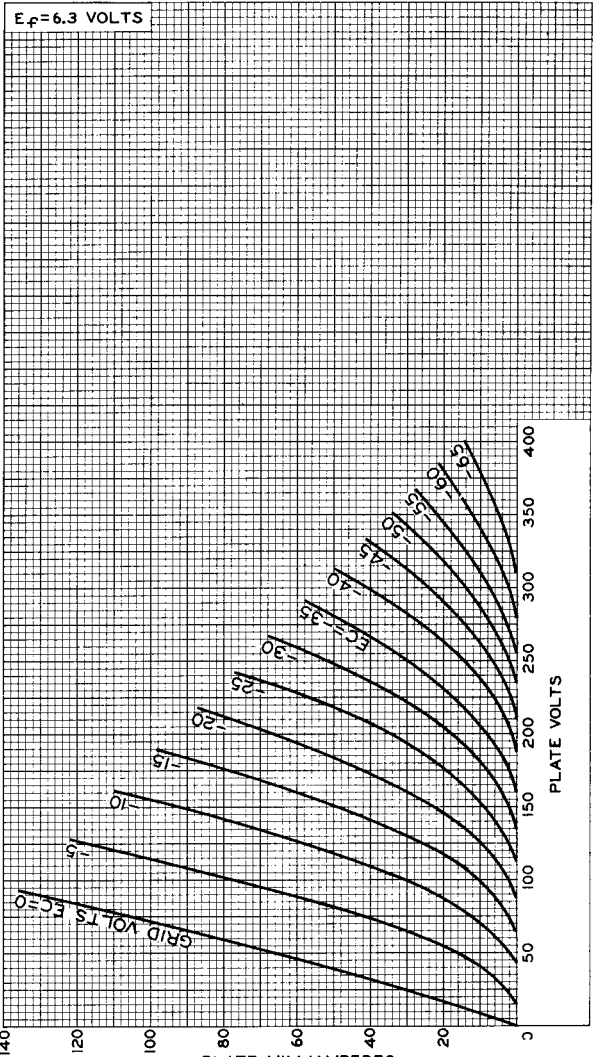


PLATE MILLIAMPERES
ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-991?


6DR7



6DR7

AVERAGE CHARACTERISTICS

UNIT No 2

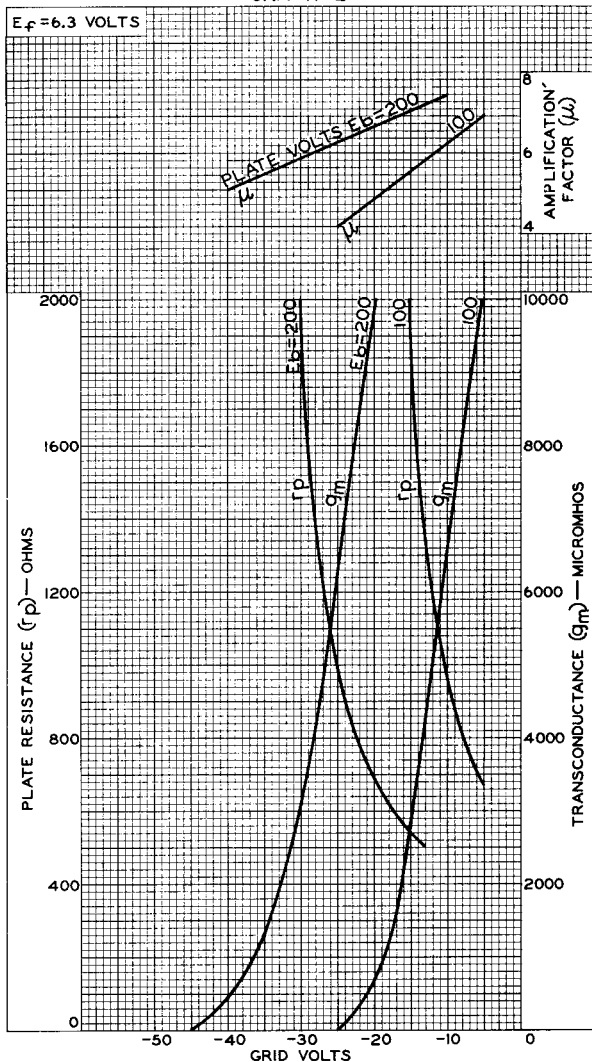

ELECTRON TUBE DIVISION

RADIO CORPORATION OF AMERICA, HARRISON, NEW JERSEY

92CM-9914