

Characteristics of OSRAM VALVES.


TYPE D.E.3.

DULL EMITTER.

Detector and L.F. Amplifying Valve.

(For use with 4-volt Accumulators and Dry Batteries).

ANODE CURRENT/GRID VOLTS CHARACTERISTIC.

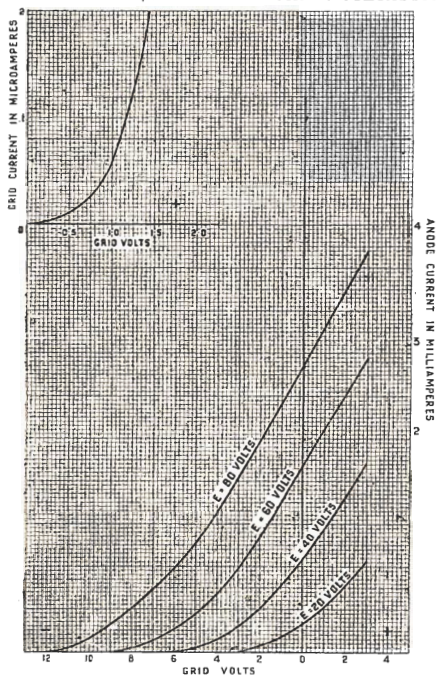

| | | | | | |
|----------------------|----|----|----|----|--------------|
| Filament Volts | .. | .. | .. | .. | 2.8. |
| Filament Current | .. | .. | .. | .. | 0.06 amps. |
| Anode Volts | .. | .. | .. | .. | 20-80. |
| Impedance | .. | .. | .. | .. | 22,000 ohms. |
| Amplification Factor | .. | .. | .. | .. | 7 |