

Type A.C.064

DIRECTLY HEATED OUTPUT VALVE


Price 16/-
(In I.F.S. 17/9)

Application.

Output valve in A.C.
all-mains receivers.


Characteristics.

- *Anode Impedance 2,000 ohms
- *Amplification Factor 6
- *Mutual Conductance 3.0 mA./volt
- *At Anode Volts 100 ; Grid Volts, Zero.

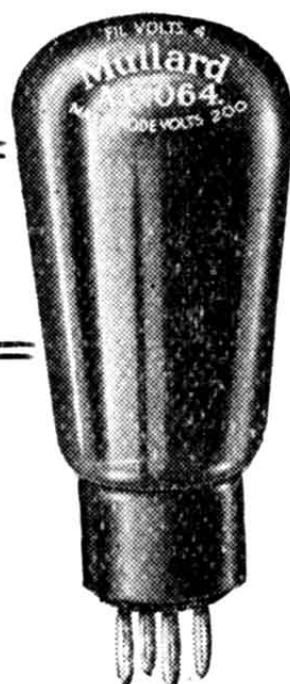

Operating Data.

- Max. Filament Voltage 4.0 volts
- Filament Current 1.0 amp.
- Max. Anode Voltage 200 volts

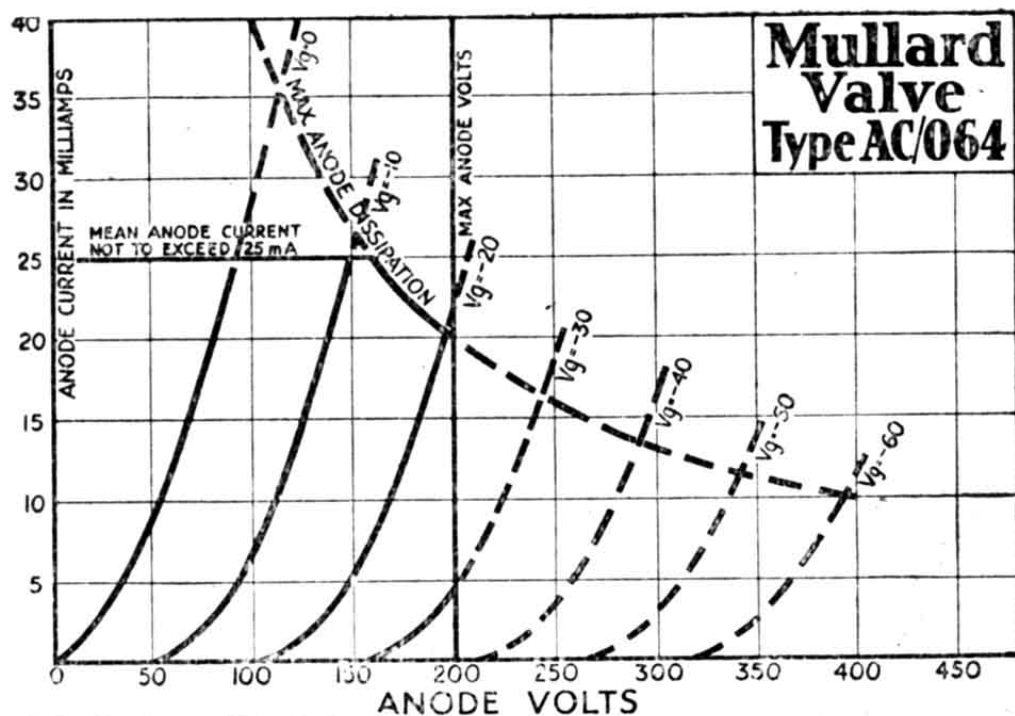

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
150	14.0	16.0
175	17.5	18.0
200	21.0	20.0

Mullard the Master Valve