

Characteristics of OSRAM VALVES.


TYPE D.E.5.

DULL EMITTER.

Power Amplifying Valve.

(For use with 6-volt Accumulators).

ANODE CURRENT/GRID VOLTS CHARACTERISTIC.

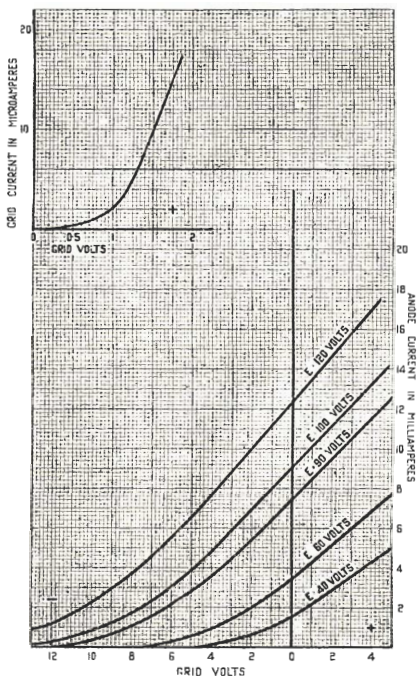

Filament Volts	5-6.
Filament Current	0.25 amps.
Anode Volts	60-120.
Impedance	8,000 ohms.
Amplification Factor	7.