

OUTPUT PENTODE

Output pentode primarily intended for use as line time base output valve in television receivers with series connected heaters.

PL38 PL38M

HEATER

Suitable for series operation, a.c. or d.c.

I_h	300	mA
V_h	30	V

CAPACITANCES

	PL38M	PL38	
C_{in}	18	18	pF
C_{out}	9.5	6.5	pF
C_{a-g1}	< 1.0	< 1.2	pF


CHARACTERISTICS

V_a	200	V
V_{g2}	200	V
V_{g1}	-5.5	V
I_a	75	mA
I_{g2}	9.0	mA
g_m	13.5	mA/V
r_a	20	k Ω
μ_{g1-g2}	16.5	

LIMITING VALUES

$V_{a(b)}$ max.	1.2	kV
V_a max.	800	V
$V_{a(pk)}$ max.	8.0	kV
$V_{g2(b)}$ max.	800	V
V_{g2} max.	400	V
p_a max.	25	W
p_{g2} max.	8.0	W
I_k max.	200	mA
V_{g1} max. ($I_{g1} = +0.3 \mu A$)	-1.3	V
* R_{g1-k} max. ($p_a < 25W$)	500	k Ω
* R_{g1-k} max. ($p_a < 9W$)	800	k Ω
V_{h-k} max.	200	V
R_{h-k} max.	20	k Ω

*For self bias operation.

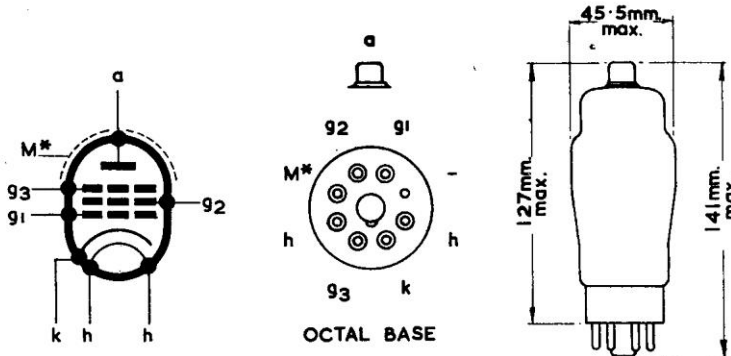


* External metallising on type PL38M only.

732


PL38 PL38M

OUTPUT PENTODE

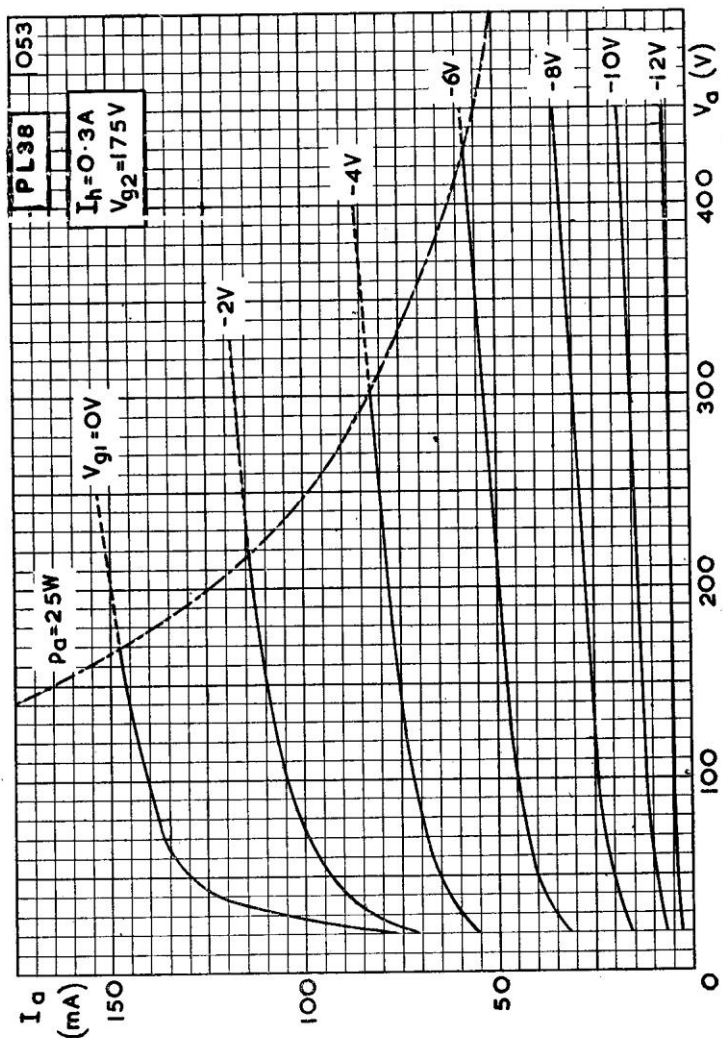

ANODE CURRENT PLOTTED AGAINST ANODE VOLTAGE WITH CONTROL-GRID VOLTAGE AS PARAMETER AT $V_{g2} = 175V$


PL38 PL38M

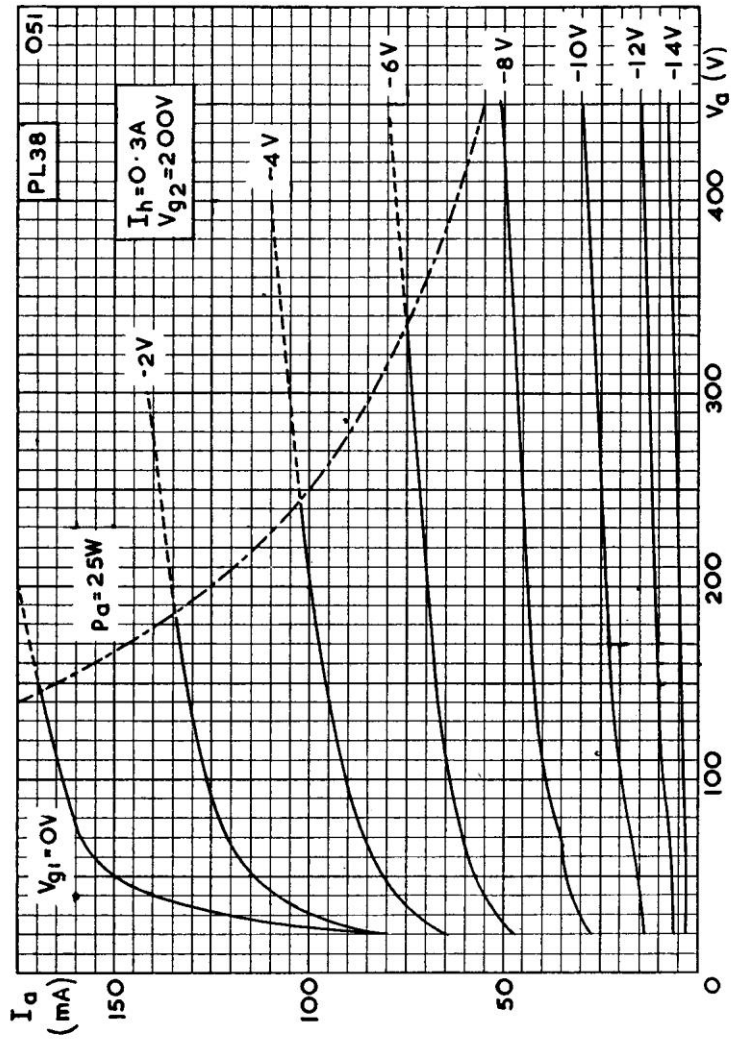

ANODE CURRENT PLOTTED AGAINST ANODE VOLTAGE WITH CONTROL-GRID VOLTAGE AS PARAMETER AT $V_{g2} = 200V$

PL38 PL38M

OUTPUT PENTODE

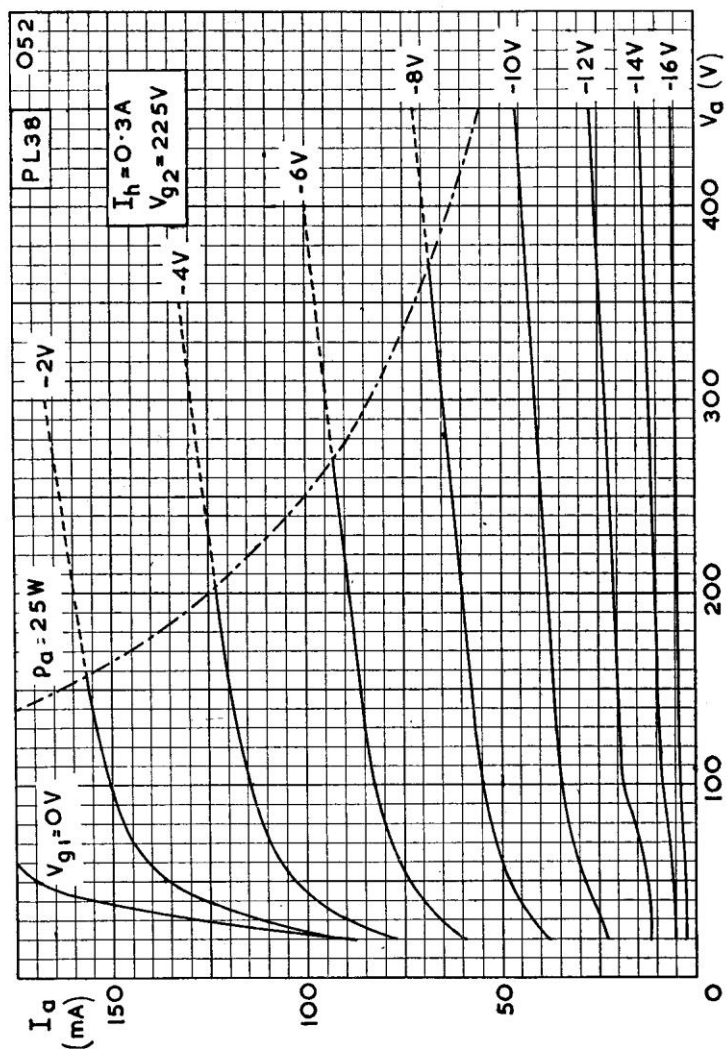

ANODE CURRENT PLOTTED AGAINST ANODE VOLTAGE WITH CONTROL-GRID VOLTAGE AS PARAMETER AT $V_{g2} = 225V$