


General Purpose but specially designed for
Intermediate Frequency

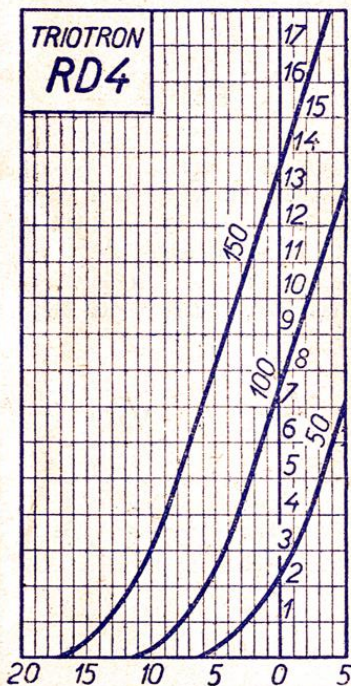

RD 4

Filament voltage 4 Volts
 Filament current 0.07 Amps
 Slope 1 mA/V
 Amplification factor 9
 Impedance 9,000 Ohms
 Max. Plate voltage 150 Volts

V_a	V_g
100	-4
150	-7

This is a special type for "Super-Hets", not only for Intermediate frequency, but also as Oscillator and Modulator.