

# TRIOTRON


## Universal Double-Diode.

TYPE  
D. 1300.

### Application.

This type gives linear rectification and delayed AVC for AC/DC Superhet circuits. It is recommended to use Type S.1328 as L.F. Amplifier following the Diode detector.

Metallised bulb and 5-pin base, which can be replaced by side-contact base if required.

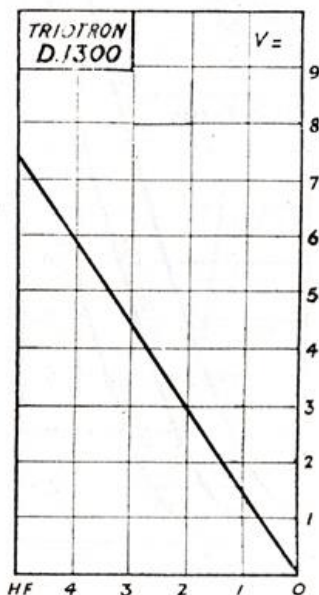

### Operating Data.

Heater: Indirectly heated for AC/DC operation.

Current .. .. 0.2 Amp.

Voltage .. .. 13 Volts approx.

Max. Diode Voltage .. .. 200 Volts Peak.

Max. Current per Diode .. 0.8 mA.

Max. Voltage between Cathode  
and Heater 125 Volts.

(Standard 5-pin Base.)