

Type DO.20

DIRECTLY HEATED OUTPUT VALVE

Price 30/-
(In I.F.S. 33/-)

Application.


Output valve for powerful receivers and amplifiers.

Characteristics.

- *Anode Impedance 2,000 ohms
- *Amplification Factor 5
- *Mutual Conductance 2.5 mA./volt
- *At Anode Volts 100 ; Grid Volts, Zero.

Operating Data.

- Max. Filament Voltage 7.5 volts
- Filament Current 1.3 amps.
- Max. Anode Voltage 425 volts

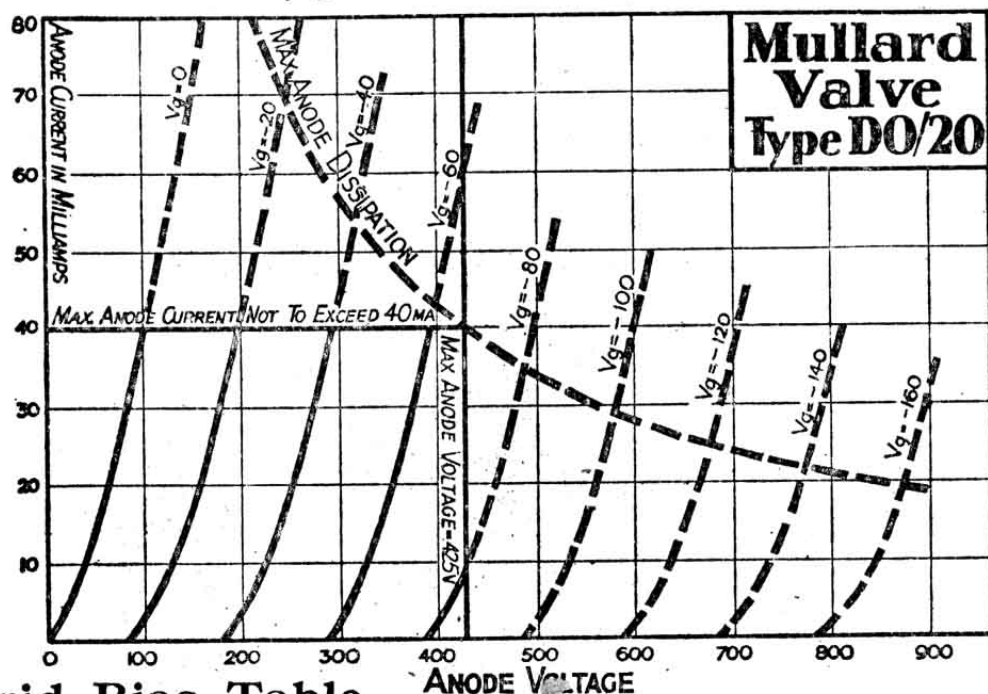

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
325	48.0	32.0
350	52.5	34.0
375	57.0	36.0
400	61.5	38.0
425	66.0	40.0

Mullard the Master Valve