

Type D.W.6

FULL WAVE RECTIFIER VALVE

Price 60/-

(In I.F.S. 70/-)

Special Holder 5/9 nett.

(In I.F.S. 6/9 nett)



Application.


Full wave rectifier for use in H.T. supply units or battery charging equipments.

Operating Data.

Max. Filament Voltage
4.0 volts

Filament Current
4.0 amps.

Max. Anode Voltage
1,000-1,000 volts

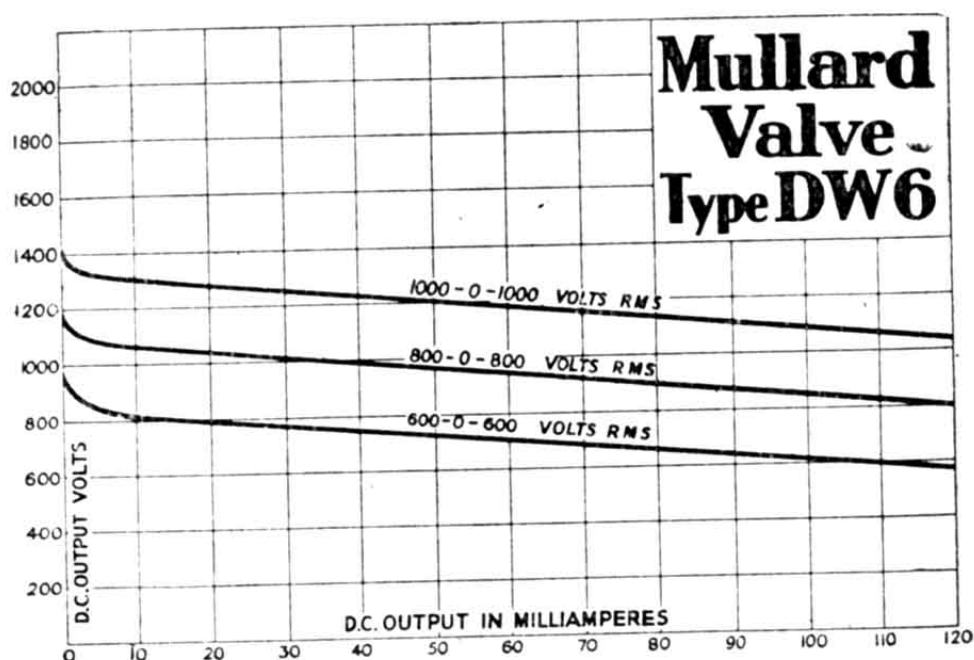

Output.

Max. Rectified Output 120 mA. D.C.

Mullard the Master Valve