

Type P.M.22.

PENTODE OUTPUT VALVE

Price 20/-
(In I.F.S. 22/-)

Application.


Five-electrode output valve
(Pentode).

Characteristics.

*Mutual Conductance 1.3 mA./volt
*At Anode Volts 100 ;
Auxiliary Grid Volts 100 ;
Control Grid Volts, Zero.

Operating Data.

Max. Filament Voltage 2.0 volts
Filament Current 0.3 amp.
Max. Anode Voltage 150 volts
Max. Auxiliary Grid Voltage 150 volts

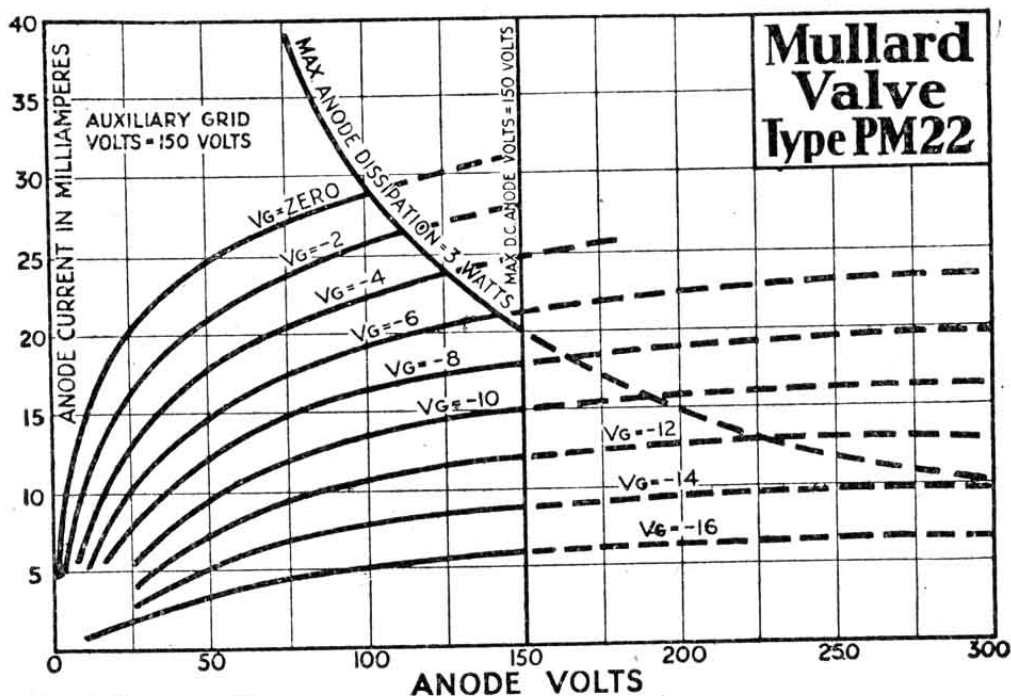

Grid Bias Table.

Auxiliary Grid Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	6.0	9.0
125	8.0	12.0
150	10.0	15.0

Mullard the Master Valve