

# Type P.M.24.

## FIVE ELECTRODE OUTPUT VALVE

Price 20/-  
(In I.F.S. 22/-)

### Application.


Five electrode output valve (Pentode).

### Operating Data.

Max. Filament Voltage 4.0 volts  
 Filament Current 0.15 amp.  
 Max. Anode Voltage 150 volts  
 Max. Auxiliary Grid Voltage 150 volts

### Characteristics.

\*Mutual Conductance 1.75 mA./volt  
 \*At Anode Volts 100 ; Auxiliary Grid Volts 100 ; Control Grid Volts, Zero.

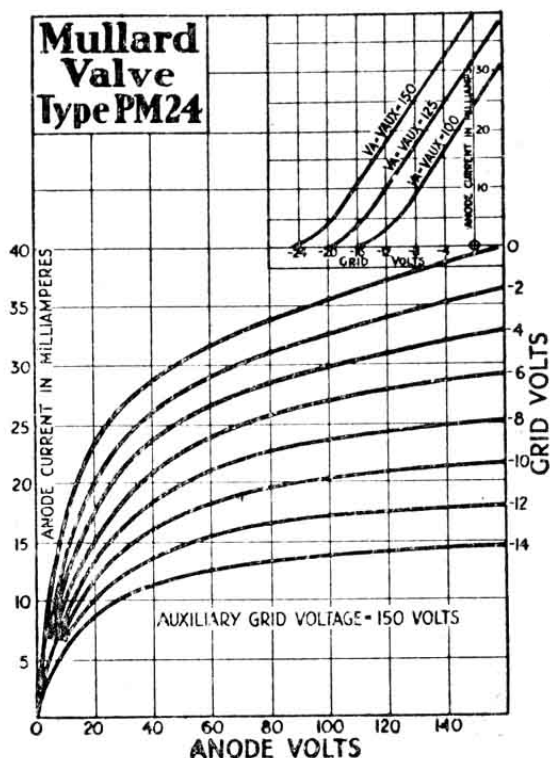

### Grid Bias Table.

Auxiliary Grid Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
75	3	8
100	6	12
125	9	16
150	12	20

**Mullard the Master Valve**