

Type P.M.24C.

FIVE ELECTRODE OUTPUT VALVE

Price 27/6
(In I.F.S. 30/-)

Application.


Five electrode output valve (pentode).

Characteristics.

*Mutual Conductance 3.0 mA./volt
*At Anode Volts 400 ;
Auxiliary Grid Volts 200 ;
Control Grid Volts, -20.

Operating Data.

Max. Filament Voltage 4.0 volts
Filament Current 1.0 amp.
Max. Anode Voltage 400 volts
Max. Auxiliary Grid Voltage 200 volts

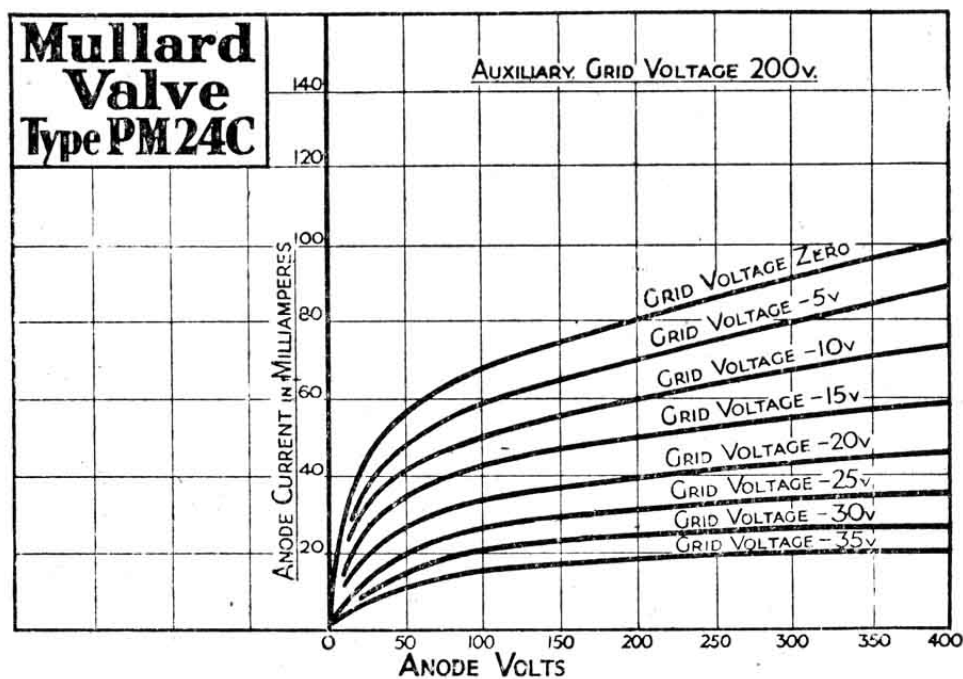

Grid Bias Table.

Auxiliary Grid Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
200	28.0	30

Mullard the Master Valve