

# Type P.M.24D.



## FIVE ELECTRODE OUTPUT VALVE

Price 45/-  
(In I.F.S. 49/6)

### Application.


Five electrode output valve (pentode).

### Characteristics.

- \*Mutual Conductance  $\sim 4.0$  mA./volt
- \*At Anode Volts 100;  
Auxiliary Grid Volts 100;  
Control Grid Volts Zero.

### Operating Data.

- Max. Filament Voltage 4.0 VOLTS
- Filament Current 2.0 amp.
- Max. Anode Voltage 500 volts
- Max. Auxiliary Grid Voltage 200 volts

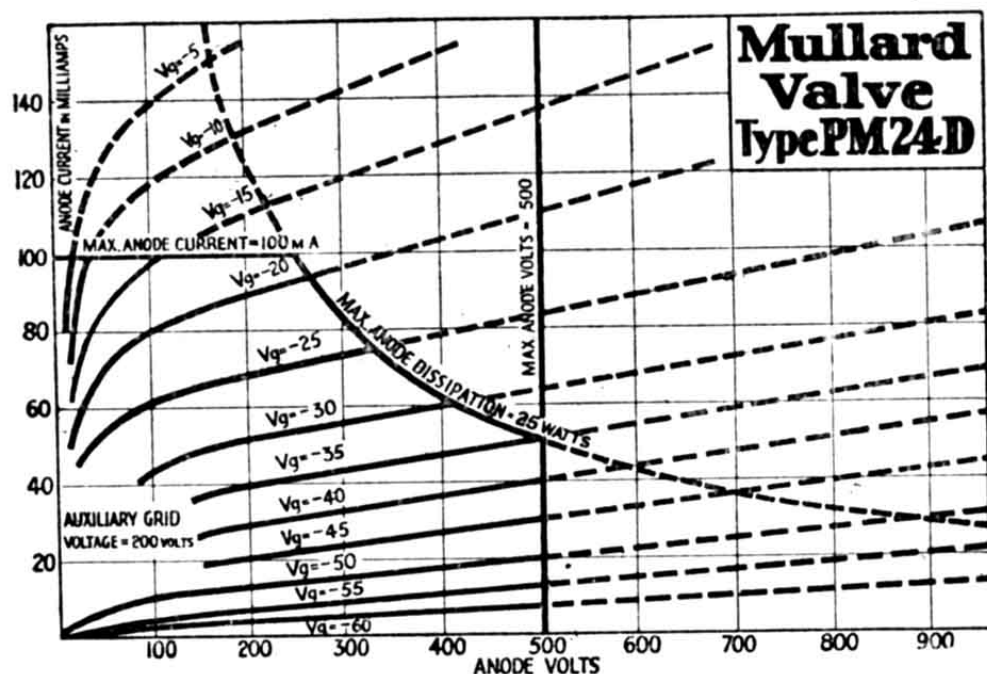

### Grid Bias Table.

Auxiliary Grid Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
200	35	50

**Mullard the Master Valve**