


# Type P.M.252

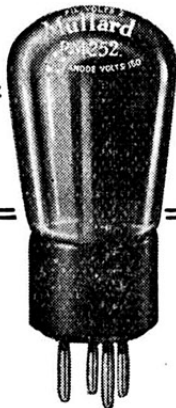

## " SUPER-POWER " OUTPUT VALVE

Price 13/6  
(In I.F.S. 15/-)

### Application.


Super-power valve.

### Characteristics.

- \*Anode Impedance 1,900 ohms
- \*Amplification Factor 7.0
- \*Mutual Conductance 3.7 mA./volt
- \*At Anode Volts 100; Grid Volts, Zero.

### Operating Data.

- Max. Filament Voltage 2.0 volts
- Filament Current 0.4 amp.
- Max. Anode Voltage 150 volts

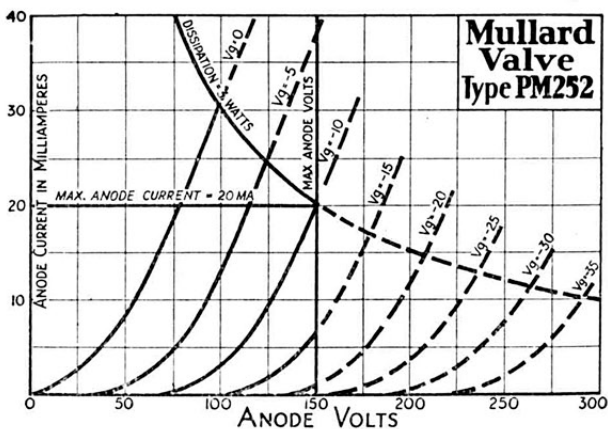

### Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	6.0	11.0
125	7.5 to 10.5	14.0
150	9.0 to 12.0	17.0

**Mullard the Master Valve**