

Type P.M.256.

OUTPUT VALVE

Price 13/6
(In I.F.S. 15/-)

Application.


Super-power output valve.

Characteristics.

- *Anode Impedance 1,850 ohms
- *Amplification Factor 6.0
- *Mutual Conductance 3.25 mA./volt
- *At Anode Volts 100 ; Grid Volts, Zero.

Operating Data.

Max. Filament Voltage 6.0 volts
 Filament Current 0.25 amp.
 Max. Anode Voltage 250 volts

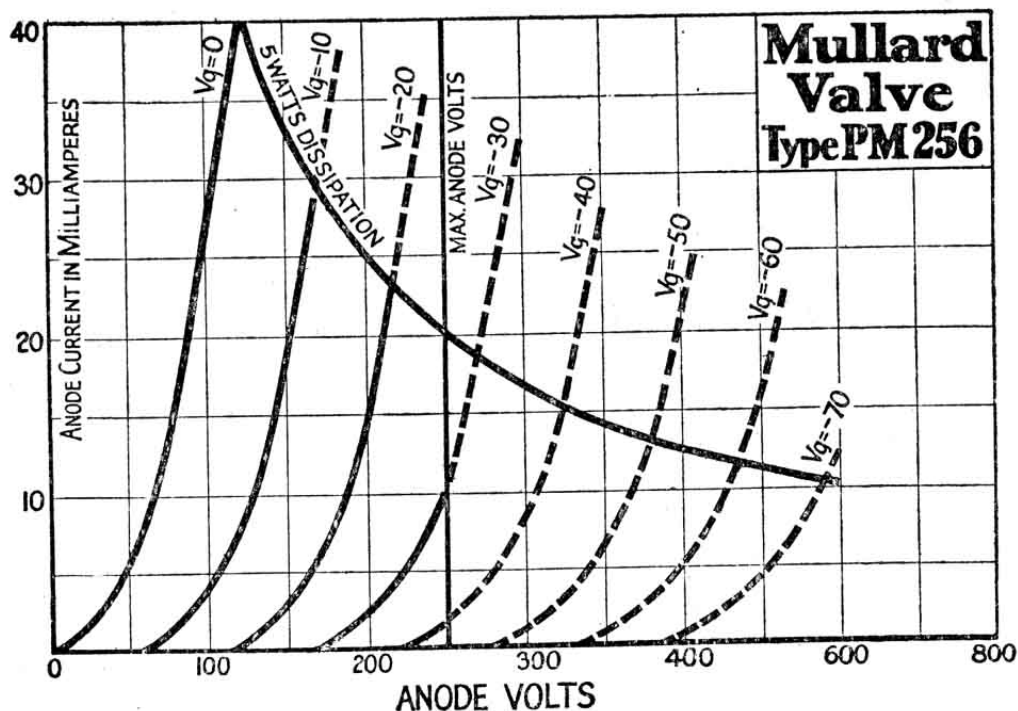

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	7.5 to 9.0	6.0
150	10.5 to 13.5	10.0
200	18.0 to 21.0	15.0
250	27.0	20.0

Mullard the Master Valve