

# Type P.M.256A

## OUTPUT VALVE

Price 13/6  
(In I.F.S. 15/-)

### Application.


Super-power output valve.

### Characteristics.

- \*Anode Impedance 1,400 ohms.
- \*Amplification Factor 3.6
- \*Mutual Conductance 2.6 mA./volt
- \*At Anode Volts 100 ; Grid Volts, Zero.

### Operating Data.

- Max. Filament Voltage 6.0 volts
- Filament Current 0.25 amp.
- Max. Anode Voltage 200 volts

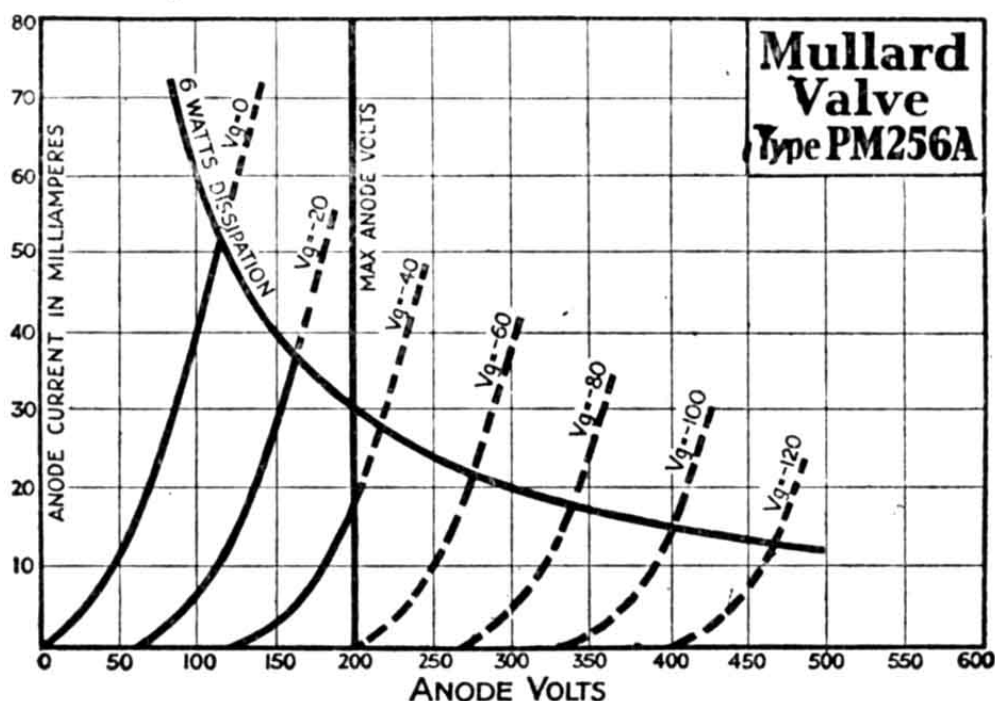

### Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	12.0	17.0
150	22.5	23.5
200	33.0	30.0

**Mullard the Master Valve**