

P.M.2BA

CLASS "B" OUTPUT VALVE

OPERATING DATA.


Filament Voltage	2.0 V.
Filament Current	0.2 A
Max. Anode Voltage	150 V.
Normal Anode Voltage	120 V.
Minimum Input Impedance		3,000-5,000 ohms
Optimum Load (Plate-to-Plate) for		
Anode Volts 120	14,000 ohms
Negative Grid Bias	4.5 V

APPLICATION

Output valve comprising two triodes operating on the Class "B" or positive drive principle. By the use of the slight negative bias recommended increased sensitivity and improved reproduction are obtained at low signal input voltages. The driver valve should be type P.M.2DX or type T.D.D.2A. Suitable circuit conditions are given on page 88.

BASE

Standard 7-pin. For connections see page 91.

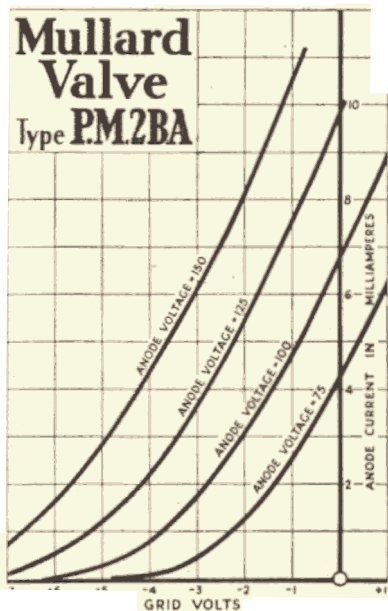

PRICE 14/-

Mullard
THE MASTER VALVE