

# Type S.4V.A.



## INDIRECTLY HEATED SCREENED GRID VALVE


Price 22/6  
(In I.F.S. 24/9)

### Application.

Screened-grid high frequency amplifying valve for A.C. all-mains receivers.

### Operating Data.

Max. Heater Voltage  
4.0 volts  
Max. Heater Current  
1.0 amp.  
Max. Anode Voltage  
200 volts  
Positive Screen Voltage  
75-100 volts

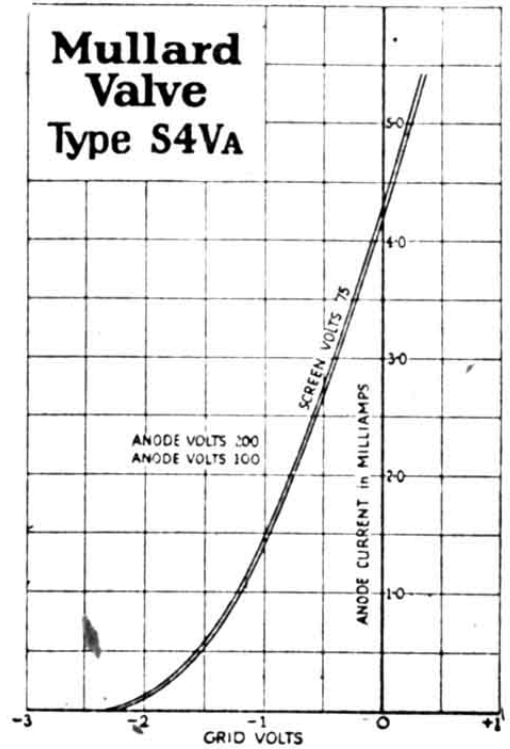

### Characteristics.

\*Anode Impedance .. .. . 430,000 ohms  
\*Amplification Factor .. .. . 1,500  
\*Mutual Conductance .. .. . 3.5 mA./volt

\*At Anode Volts 100; Positive Screen Voltage 75; Grid Volts, Zero.

# Mullard the Master Valve