


# Super Detector

High Frequency and first stage Low Frequency

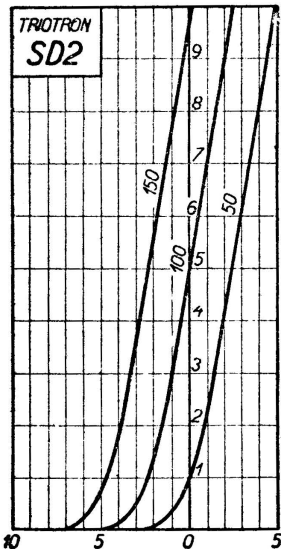

## SD 2

Filament voltage	2 Volt
Filament current	0.14 Amps
Slope	2 mA/V
Amplification factor	21
Impedance	10,400 Ohms
Max. Plate voltage	150 Volts

$V_a$	$V_g$
100	-1.5
150	-3

*This valve ensures greater amplification.*