


Detector and Low Frequency

if followed by transformer coupling

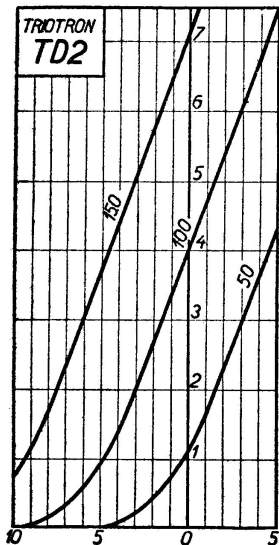

TD 2

Filament voltage	2 Volts
Filament current	0.07 Amps
Slope	0.75 mA/V
Amplification factor	10.8
Impedance	14.400 Ohms
Max. Plate voltage	150 Volts

V_a	V_g
100	-3
150	-6

This type can be supplied

Metal sprayed

Dont use 2 Volt valves with 4 Volt accumulator.