

Type A.C.044

**DIRECTLY HEATED
OUTPUT VALVE**

Price 20/-
(In I.F.S. 22/-)

Application.


Output valve in A.C. all-
mains receivers.

Characteristics.

- *Anode Impedance 1,150 ohms
- *Amplification Factor 4
- *Mutual Conductance 3.5 mA./volt
- *At Anode Volts 100 ; Grid Volts, Zero.

Operating Data.

- Max. Filament Voltage 4.0 volts
- Filament Current 0.7 amp.
- Max. Anode Voltage 200 volts

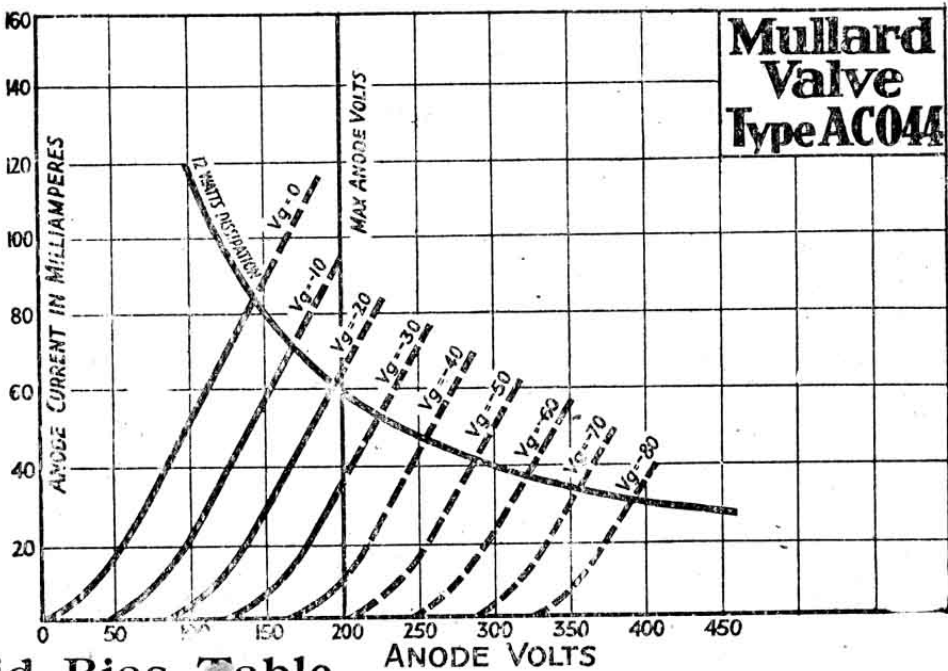

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	14.0	15.0
150	23.0	22.5
200	32.0	30.0

Mullard the Master Valve