

ELECTRONIC VALVE SPECIFICATIONS

SPECIFICATION CV4046

ISSUE 2 DATED 1st NOVEMBER 1956

AMENDMENT NO. 2

Page 2 - Group A - Electrode Insulation

In column headed "Test Conditions"

Amend:-

Va' - all = -400V to read Va' - all = -300V

and

Va" - all = -400V to read Va" - all = -300V

March 1960

R. R. E.

NK. 16545

ELECTRONIC VALVE SPECIFICATIONS

SPECIFICATION CV 4046

ISSUE 2. DATED 1.11.56

AMENDMENT NO. 3

PAGE 2.

GROUP B.

Grid Voltage. Amend Limits Min. from 9.8 to 12
" Limits Max. from 18.2 to 20

Screen Current. Amend Limits Max from 5.0 to 2.5

GROUP C

Inner Amplification Factor.

Amend Limits Min. from 5.25 to 4.0

" Limits Bogey from 6.5 to 5.25

" Limits Max from 7.75 to 6.5

March 1960

Royal Radar Establishment.

N. 16633

Specification MOS(A)/CV.4046 Issue 2 Dated 1.11.56 To be read in conjunction with BS.448, BS.1409 and E.1001	<u>SECURITY</u>	
	<u>Specification</u> UNCLASSIFIED	<u>Valve</u> UNCLASSIFIED

—————> Indicates a change

TYPE OF VALVE - Reliable Double Tetrode beam power amplifier CATHODE - Indirectly heated ENVELOPE - Glass, lower portion in metal shell PROTOTYPE - CV.415		<u>MARKING</u> K1001/4																					
		<u>BASE</u> BS448/B9G																					
<u>RATING</u> (All limiting values are absolute)		Note	<u>CONNECTIONS</u>																				
Heater Voltage (V)	6.3	B	<table border="1"> <thead> <tr> <th>Pin</th> <th>Electrode</th> </tr> </thead> <tbody> <tr><td>1</td><td>Heater h</td></tr> <tr><td>2</td><td>Grid (1) g'1</td></tr> <tr><td>3</td><td>Cathode + BP k + bp</td></tr> <tr><td>4</td><td>Anode (1) a'</td></tr> <tr><td>5</td><td>Scr(1) + Scr(2) g'2, g'2</td></tr> <tr><td>6</td><td>Anode (2) a''</td></tr> <tr><td>7</td><td>Cathode + BP k + b p</td></tr> <tr><td>8</td><td>Grid (2) g''1</td></tr> <tr><td>9</td><td>Heater h</td></tr> </tbody> </table>	Pin	Electrode	1	Heater h	2	Grid (1) g'1	3	Cathode + BP k + bp	4	Anode (1) a'	5	Scr(1) + Scr(2) g'2, g'2	6	Anode (2) a''	7	Cathode + BP k + b p	8	Grid (2) g''1	9	Heater h
Pin	Electrode																						
1	Heater h																						
2	Grid (1) g'1																						
3	Cathode + BP k + bp																						
4	Anode (1) a'																						
5	Scr(1) + Scr(2) g'2, g'2																						
6	Anode (2) a''																						
7	Cathode + BP k + b p																						
8	Grid (2) g''1																						
9	Heater h																						
Heater Current (A)	1.6																						
Max. Heater-Cathode Voltage (V)	±150																						
Max. Operating Anode Voltage (V)	400																						
Max. Anode Voltage (I _a = 0) (V)	500																						
Max. Dissipation per Anode (W)	8.0																						
Max. Operating Screen Voltage (V)	400																						
Max. Screen Voltage (I _{g2} = 0) (V)	425																						
Max. Screen Dissipation (Both Screens) (W)	3.0																						
Mutual Conductance (mA/V)	3.9	A																					
Inner Amplification Factor (μg ₁ g ₂)	6.5	A																					
Anode Impedance (kΩ)	100	A																					
→ Max. Grid 1 - Cathode Resistance for Cathode bias (kΩ)	100																						
→ Max. Grid 1 - Cathode Resistance for fixed bias (kΩ)	50																						
Max. Bulb Temperature (°C)	225	B																					
Max. Shock (Short Duration) (g)	500																						
Max. Acceleration (continuous operation) (g)	2.5																						
Max. Operating Frequency for Full Ratings (Mc/s)	200																						
Max. Mean Cathode Current (per section) (mA)	60																						
Max. Peak Cathode Current (per section) (mA)	375																						
<u>CAPACITANCES (pF)</u>			<u>DIMENSIONS</u>																				
C in (nom.))	9.0		<table border="1"> <thead> <tr> <th>Dimensions (mm)</th> <th>Min.</th> <th>Max.</th> </tr> </thead> <tbody> <tr><td>E</td><td>-</td><td>70</td></tr> <tr><td>P</td><td>-</td><td>41</td></tr> <tr><td>Q</td><td>-</td><td>45</td></tr> </tbody> </table>	Dimensions (mm)	Min.	Max.	E	-	70	P	-	41	Q	-	45								
Dimensions (mm)	Min.	Max.																					
E	-	70																					
P	-	41																					
Q	-	45																					
C out (nom.)) (per section)	7.5																						
Ca, g'1 (nom.))	0.05																						
Ca', a'' (nom.))	0.3																						
			<u>MOUNTING POSITION</u> Any																				
<u>NOTES</u>																							
<p>A. Measured at V_a = 250V, V_{g2} = 135V, I_a = 30 mA.</p> <p>B. <u>Caution to Electronic Equipment Design Engineers:</u> Special attention should be given to the temperature of valves to be operated in aircraft. Reliability will be seriously impaired if the maximum bulb temperature is exceeded. The life expectancy may be reduced if conditions other than those specified for life tests are imposed on the valve and will be reduced appreciably if absolute maximum ratings are exceeded. Both reliability and performance will be jeopardised if heater voltage ratings are exceeded: life and reliability performance are directly related to the degree that regulation of the heater voltage is maintained at its centre-rated value.</p>																							

To be performed in addition to those applicable in K1001

Tests shall be performed in the specified order unless otherwise agreed with the Inspecting Authority

Test Conditions - unless otherwise specified												
Vh(V)		Va(V)		Vg1(V)		Vg2(V)		Ia(mA)		Note 2		
6.3		250		Vary		135		30				
K1001 Ref.	Test	Test Conditions	AQL %	Insp. Level	Symbol	Limits						Units
						Min.	LAL	Bogey	UAL	Max.	ALD	
7.1	Glass Strain	No Voltages	6.5	I								
	<u>Group A</u>											
	Electrode Insulation	Vh = 6.3 Note 1 Vg1 - all = -100V Vg2 - all = -100V Va - all = -400V Va - all = -400V		100% 100% 100% 100%	R R R R	100 100 100 100	- - - -	- - - -	- - - -	- - - -	MΩ MΩ MΩ MΩ	
	Reverse Grid Current	Rg1 = 50KΩ max.		100%	Ig1	-	-	-	-	2.0	-	μA ←
	Output Power	Va(b) = 400V Adjust Vg2 Note 3		100%	P out	17	-	-	-	-	-	Watts
	Emission	Note 13		100%	Ik	33	-	-	-	-	-	mA ←
	<u>Group B</u>											
		Combined AQL		1.0								
5.3	Heater Current		0.65	II	Ih	1.48	-	-	-	1.72	-	A
	hk Leakage Current	Vhk = ±100V Note 4	0.65	II	Ihk	-	-	-	-	20	-	μA
	Grid Voltage		0.65	II	-Vg1	9.8	-	-	-	18.2	-	V
	Screen Current		0.65	II	Ig2	-	-	2	-	5.0	-	mA
	Mutual Conductance		0.65	II	Δgm	2.9	-	-	-	4.9	-	mA/V
	Change of Mutual Conductance	Vh = 5.7V	0.65	II	Δgm	-	-	-	-	15	-	%
	<u>Group C</u>											
		Combined AQL		6.5								
	Anode Current	Vg1 = -50V	2.5	I	Ia	-	-	-	-	1	-	mA
	Inner Amplification Factor	Max. grid swing 1V	2.5	I	μg1g2	5.25	-	6.5	-	7.75	-	
	Reverse Grid Current	Vh = 6.9V Note 5	2.5	I	Ig1	-	-	-	-	4	-	μA
	Vibration Noise	RL = 2k Notes 6 and 7	2.5	I	Va AC	-	-	-	-	20	-	mV rms


K1001 Ref.	Test	Test Conditions	AQL %	Insp. Level	Symbol	Limits						Units										
						Min.	LAL	Begey	UAL	Max.	ALD											
→ 5.9	<u>Group D</u>		6.5	IA	C in ¹ C out ¹ Ca ¹ ,g ¹ C in ² C out ² Ca ² ,g ² C out ² C out ² Ca ¹ ,Ca ²	-	-	-	-	10.25	-	DP										
	Capacitances	Measured on 1 Mc/s bridge with valve mounted in a fully screened socket. No external screen.				-	-	-	-	9.5	-	DP										
						-	-	-	-	0.06	-	DP										
						-	-	-	-	10.25	-	DP										
						-	-	-	-	9.5	-	DP										
						-	-	-	-	0.06	-	DP										
						-	-	-	-	20.25	-	DP										
						-	-	-	-	0.5	-	DP										
→ 11.2	<u>Group E</u>		6.5	IA	Va AC	-	-	-	-	50	-	mV rms										
	Resonance Search	Frequency 25 - 1000 c/s Note 7											Combined AQL									
													2.5									
	Fatigue	Vh = 6.9 switched 1 min. ON 3 mins. OFF Va = 0 Acceleration = 5g min. Frequency = 170 c/s ± 5 c/s Note 8											IA									
													IA									
	<u>Post Fatigue Tests</u>												2.5	IA	-	-	-	-	40	-	µA	
	5.3	hk Leakage Current																				Combined AQL
																						2.5
	Reverse Grid Current	Rg1 = 50KΩ max.																				Ihk
																						Ig1
	Mutual Conductance	gm											2.55	-	-	-	4.9	-	mA/V			
Vibration Noise	As in Group C	Va AC	-	-	-	30	-	mV rms														
→ 11.4	Shock	Hammer Angle = 30° No Voltages	2.5	IA	-	-	-	-	-	40	-	µA										
													<u>Post Shock Tests</u>									
	5.3	hk Leakage Current											Combined AQL									
													2.5									
	Reverse Grid Current	Rg1 = 50KΩ max.											Ihk									
													Ig1									
Mutual Conductance	gm	2.55	-	-	-	4.9	-	mA/V														
Vibration Noise	As in Group C	Va AC	-	-	-	30	-	mV rms														

K1001 Ref.	Test	Test Conditions	AQL %	Insp. Level	Symbol	Limits						Units
						Min.	LAL	Bogey	UAL	Max.	ALD	
A VI/5.6	<u>Group F</u> Life	Note 9		IA								
		<u>1 Hour Test Point</u>										
		Change in Mutual Conductance	1.0		Δgm	-	-	-	-	10	-	%
		<u>500 Hour Test Point</u>										
		Output Power	Combined AQL Note 10	6.5		P out	3.5	-	-	-	-	watts
		Peak Emission	Notes 2 and 11	2.5		$I_a + I_{g2}$	500	-	-	-	-	mA
		Inoperatives		2.5								
		Heater Current		2.5		Ih	1.48	-	-	-	1.72	A
	5.3	hk Leakage Current	$V_{hk} = \pm 100V$ Note 4	2.5		Ihk	-	-	-	-	20	μA
		Reverse Grid Current	$R_{g1} = 50K\Omega$ max. Note 12	2.5		Ig1	-	-	-	-	15.0	μA
	Mutual Conductance		2.5		gm	2.55	-	-	-	4.9	mA/V	
	Average Change of Mutual Conductance		2.5		Δgm	-	-	-	-	15	%	
A IX/2.5	Electrical Re-Test after 28 days holding period			100%								
A VI/5.6	Inoperative		0.5									
	Reverse Grid Current	$R_{g1} = 50K\Omega$ max.	0.5		Ig1	-	-	-	-	2.5	μA	

NOTES - See Overleaf

NOTES

1. For the purpose of this test the heater and cathode shall be strapped and considered as one electrode.
2. Test to be performed on each section in turn. In the section not under test $g_1 = -50$ volts, except where otherwise stated.
3. Test in Class C amplifier at frequency = 100 Mc/s. Duration of test = 5 minutes. Final emission test to be performed immediately after output power test.
4. Heater positive and negative successively.
5. Prior to this test the valve shall be pre-heated for 5 minutes under test conditions. I_{g1} shall not be rising or out of limit, after a total of 10 minutes.
6. The valve shall be mounted so that the direction of vibration is parallel to the minor axis of the electrode structure.
Vibration frequency = any fixed frequency in the range 25 - 100 c/s. Min. peak acceleration = 2g. The test shall be of sufficient duration to obtain a steady reading of noise output.
7. Vibration and Resonance Noise Test. See drawing on page 6.
8. Valves shall be vibrated in each of the three planes, for not less than 30 hours. (100 hours total).
9. Test in Class C amplifier at frequency = 100 Mc/s. Anode and screen grid supplies modulated not less than 90% at 400 ± 100 c/s. $V_a = 320V$; adjust V_{g2} to give $I_a = 80$ mA.
The valves shall be switched off and allowed to cool for not less than 10 minutes at least twelve times in every 24 hours. During the "on" period of the heaters the H.T. is to be applied for 20 minutes in each hour of this "on" time. The accumulated heater operating time constitutes the total life test time.
10. Measured unmodulated.
11. To be performed under the following conditions.
 $V_{g1} = 0$; $V_a + g_2 = 400V$ pulses 2 μ sec. long. 50 c/s repetition frequency.
12. Gas current shall not exceed $3 \mu A$.
13. $V_h = 5.7V$; $V_a + V_{g2} = 250V$; $V_{g1} = -100V$ d.c. plus 100V peak 50 c/s sinusoidal a.c.

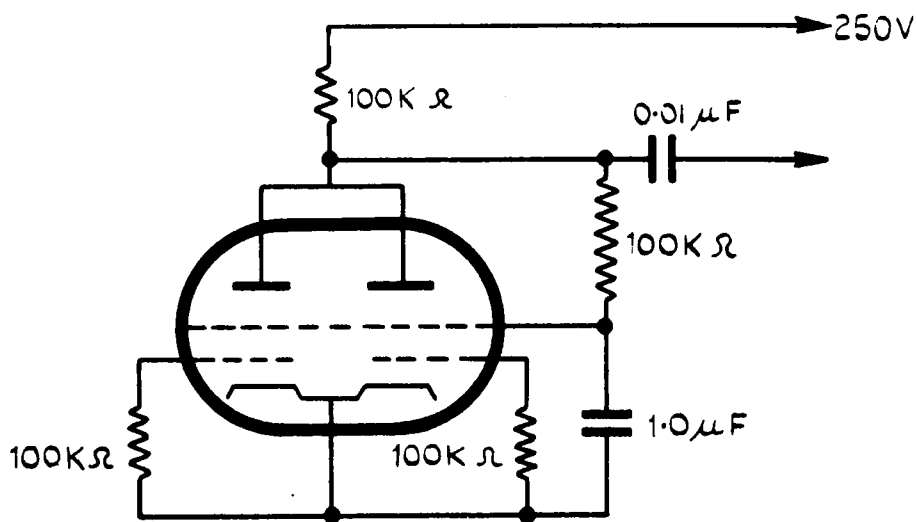

VIBRATION AND RESONANCE NOISE TEST
CIRCUIT