


Specification MOA/CV4072 Issue 2 dated 27th March 1963 To be read in conjunction with K1001, BS448 and BS1409	<u>SECURITY</u>	
	<u>Specification</u> UNCLASSIFIED	<u>Valve</u> UNCLASSIFIED

→ Denotes a change

TYPE OF VALVE - Reliable high voltage, half wave rectifier CATHODE - Indirectly heated ENVELOPE - Glass EQUIVALENT PINNED VALVE - CV4071	<u>MARKING</u> See K1001/4
	<u>BASE</u> See drawing on page 2
→ <u>RATING, CAPACITANCES AND NOTES</u> See specification MOA/CV4071 Issue 2 Dated 27th March, 1963.	<u>CONNECTIONS</u> See drawing on page 2
	<u>DIMENSIONS</u> See K1001/A1/D1 and drawing on Page 2.
Joint Services Cat No 5960-99-000-4072	<u>MOUNTING POSITION</u> Any
<u>TESTS</u> The tests required by specification MOA/CV4071 shall be performed.	

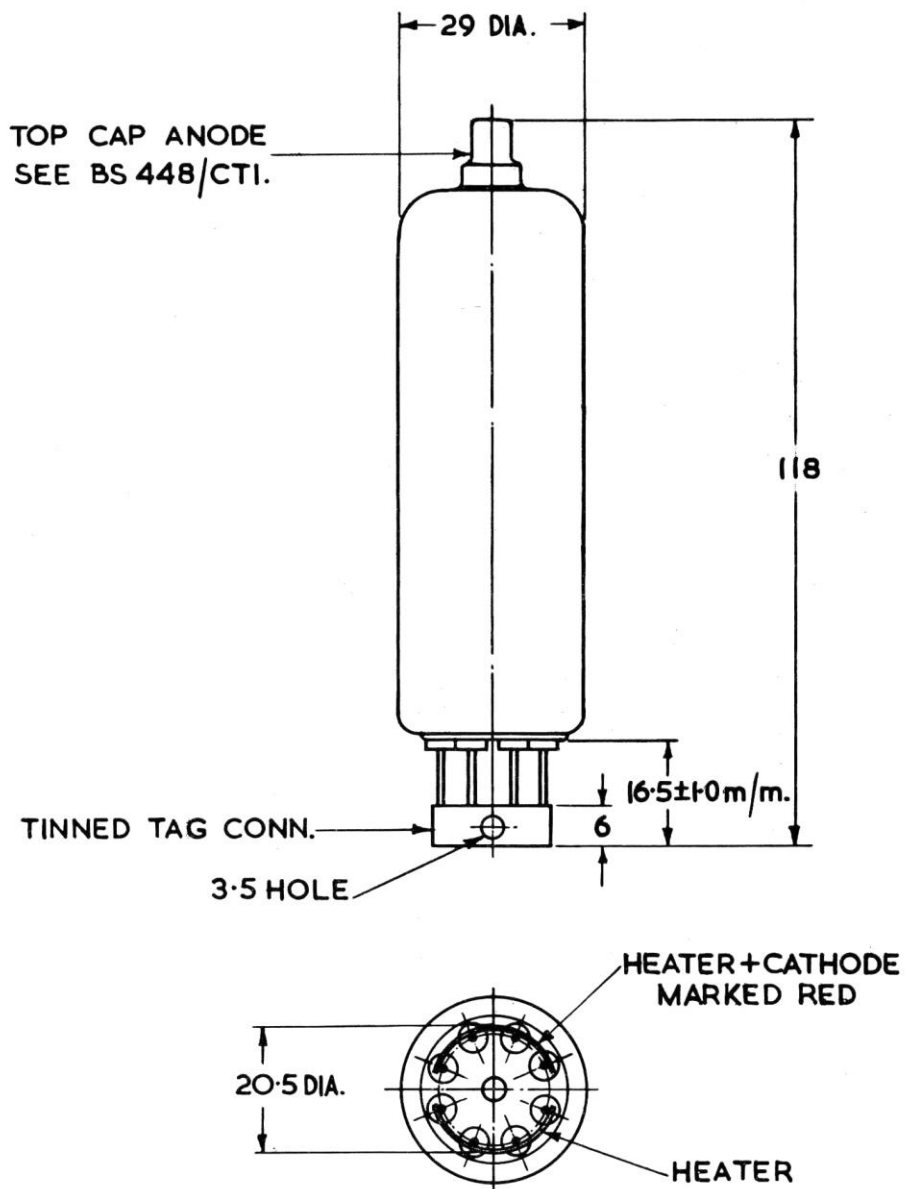

EXTERNAL VIEW

ALL DIMENSIONS IN MILLIMETRES

CV 4072/2/2