

| | | |
|---|---|---|
| Specification MCA/CV4082 Issue 1B dated 27th April, 1965 To be read in conjunction with K1001 B.S.448 and B.S.1409 | <u>SECURITY</u> <u>Specification</u> Unclassified | <u>Valve</u> <u>Unclassified</u> |
|---|---|---|

→ indicates change

| | | | | | | |
|---|---------------------|---------------------------------|--------|--------------------------------------|------------------------|----------------|
| TYPE OF VALVE - Pulse modulator tetrode | | <u>MARKING</u> See K1001/4 | | | | |
| CATHODE | - Indirectly heated | <u>BASE</u> B.S.448/B8-0/1.1 | | | | |
| ENVELOPE | - Glass | | | | | |
| PROTOTYPE | - CV2231, VX3517 | | | | | |
| <u>RATINGS AND CHARACTERISTICS</u> (Absolute, non-simultaneous and not for Inspection purposes) | | <u>CONNECTIONS</u> | | | | |
| Heater Voltage | (V) | 6.3 | Note A | Pin | Electrode | |
| Heater Current | (A) | 1.32 | | 1 | Int. Conn. | IC |
| Max. Anode Voltage (DC) | (KV) | 6.0 | | 2 | Heater | h |
| Max. Anode Voltage (Pulse) | (KV) | 8.0 | | 3 | Int. Conn. | IC |
| Max. Screen Voltage (DC) | (V) | 800 | | 4 | Screen Grid | g ² |
| Max. Anode Dissipation | (W) | 15 | | 5 | Control Grid | g ¹ |
| Max. Screen Dissipation | (W) | 3.5 | | 6 | Int. Conn. | IC |
| Max. Cathode Current (Pulse) | (A) | 10.0 | | 7 | Heater | h |
| Max. Cathode Current (DC) | (mA) | 120 | | 8 | Cathode and base shell | KS |
| Max. Anode current (Pulse) | (A) | 7.5 | | T.C. | Anode | a |
| Max. peak heater cathode voltage | (V) | ± 150 | | | | |
| Max. Grid 1/Cathode voltage | (V) | ± 200 | | | | |
| Max. Grid 1 dissipation | (W) | 0.5 | | | | |
| Max. Bulb Temperature | (C) | 240 | | | | |
| Inner Amplification Factor u(g ¹ -g ²) | | 7.5 | | | | |
| Max. Shock (short duration) | (g) | 500 | | | | |
| Max. Accn. (continuous) | (g) | 2.5 | | | | |
| <u>CAPACITANCES (pF) (note B)</u> | | | | <u>DIMENSIONS</u> See K1001/A1/D1 | | |
| C _a , g ¹ (nom) | pF | 0.75 | | Dimension (mm) | Min. | |
| C _{in} (nom) | pF | 14.0 | | | Max. | |
| C _{out} (Nom) | pF | 8.5 | | B Diameter | - | |
| | | | | A Overall Length | - | |
| | | | | L Seated Length | - | |
| | | | | | | |
| <u>TOP CAP</u> B.S.448/CT1 | | | | | | |
| | | | | <u>MOUNTING POSITION</u> Any | | |
| | | | | | | |
| <u>NOTES</u> | | | | | | |
| A. The temperature over the top 15 mm of the bulb to be not greater than 150°C. | | | | | | |
| B. Measured on 1Mc/s bridge in fully screened holder. No shield. All I.C. connections left floating. | | | | | | |

CV4082

TESTS

page 2

To be performed in addition to those applicable in K1001 and
in the specified order unless otherwise agreed with the
Inspecting Authority.

| TEST CONDITIONS - unless otherwise stated | | | | | | | | | |
|---|---|--|---|----------------------------------|--------------------|-------------------------------|------------------------------|------------------------------------|-------------------------------------|
| | | Vh(v) 6.3 | Va(v) 150 | Vg2(v) 150 | Ia(mA) 50 | LIMITS | | | |
| K1001 | TEST | TEST CONDITIONS | | AQL % | Insp. Level | Symbol | Min. | Begey | Max. |
| 7.1 | Glass Strain | No Voltages | | 6.5 | I | | | | |
| 5.2 | <u>GROUP A</u> Insulation Negative Grid Current Peak Anode Current Va = 7kV Vg2 = 600V Vg1 = -160V Note 1 | Vg1-all = -100V Vg2-111 = -300V Rg1 = 500k max. Va = 7kV Vg2 = 600V Vg1 = -160V Note 1 | | 100% | R R | 100 100 | - - | - - | M M |
| | <u>GROUP B</u> Heater Current Heater-Cathode Leakage Current Negative Grid Voltage Screen Current Mutual Conductance | Overall AQL Vhk = \pm 100V | 2.5 0.65 0.65 0.65 0.65 0.65 | II II II II II II | Ih Ihk | 1.17 - Vg1 Ig2 gm | - - 10.5 - 6.0 | 1.47 4.0 16.5 9.0 10.0 | A μ A V mA mA/V |
| | <u>GROUP C</u> Amplification Factor Anode Current High Voltage Tail Test Vibration Noise Emission | Overall AQL Vg1 = -30V Va = 7kV Vg2 = 150V Vg1 = -80V Note 4 A + g2 + g1 strapped Va pk = 250V. Note 2 | 6.5 2.5 2.5 2.5 2.5 2.5 | I I I I | Ig1-g2 Ia Ia | 6.0 - - VaAC Iapk | - - - - - 7.5 | 10.0 600 300 75 - - | mA μ A μ A mV A |

CV4082/ 1B/2

| K1001 | TEST | TEST CONDITIONS | AQL % | Insp. Level | Symbol | Limits | | | Units |
|-------------|--|--|-------|-------------|------------------------|---------------------|---------------------|----------------------|----------------|
| | | | | | | Min | Bogey | Max | |
| | <u>GROUP D</u> Capacitance | Measured on 1 Mc/s bridge with valve in fully screened holder No shield. Note 6. | 6.5 | IC | Cag 1 C in C out | 0.55 12.5 7.0 | 0.75 14.0 8.5 | 0.95 15.5 10.0 | pF pF pF |
| 11.3 | <u>GROUP E</u> Fatigue | Vh = 6.9V Note 3 | | IA | | | | | ← |
| | <u>Post Fatigue Tests</u> | Combined AQL ----- | 6.5 | | | | | | ← |
| | Heater-Cathode Leakage Current | Vhk = ± 100V | 2.5 | | Ihk | - | - | 100 | µA |
| | Negative Grid Current Mutual Conductance | Rg1 = 500k max. | 2.5 | | Ig1 | - | - | 3 | µA |
| | Vibration Noise | Note 4 | 2.5 | | gm | 6.0 | - | 10 | mA/V |
| | Peak Anode Current | As in Group 4 | 2.5 | | Va AC | - | - | 120 | mVrms |
| 11.4 | <u>Shock</u> | No Voltages Hammer Angle = 30° | | IA | Ia pk | 1.5 | - | - | A |
| | <u>Post Shock Tests</u> | Combined AQL ----- | 6.5 | | | | | | ← |
| | Heater-Cathode Leakage Current | Vhk = ± 100V | | | Ihk | - | - | 100 | µA |
| | Negative Grid Current Mutual Conductance | Rg1 = 500k max. | 2.5 | | Ig1 | - | - | 3 | µA |
| | Vibration Noise | Note 4 | 2.5 | | gm | 6.0 | - | 10 | mA/V |
| | Peak Anode Current | As in Group A | 2.5 | | Va AC | - | - | 120 | mVrms |
| | | | | | Ia pk | 1.5 | - | - | A |
| AV1/5 | <u>GROUP F</u> Life | Va = 6kV Vg2 = 600V Vg1 = -160V Vhk = 240V AC IK pk = 3A approx Pulse length = 2 µS. Prf = 1000 c/s Positive g ¹ excursion = 50V Note 5 | | | | | | | |
| AV1/ 5.1 | Stability Life Test Change in mutual conductance | | 1.0 | I | gm | - | - | 15 | % |
| AV1/ 5.3 | Intermittent Life Test | | | IA | | | | | |

| K1001 | TEST | TEST CONDITION | AQL % | Ins p. Level | Symbol | LIMITS | | | UNITS |
|--|---|---------------------|-------------------|--------------|-----------|-----------|-------|------------|---------|
| | | | | | | Min | Bogey | Max. | |
| | GROUP F | | | | | | | | |
| | <u>Life Test end point (500 hrs)</u> | | | | | | | | |
| | Inoperatives Heater current Heater-Cathode Leakage Current | Vhk = $\pm 100V$ | 2.5 6.5 6.5 | | Ih Ihk | 1.17 - | - | 1.47 60 | μA |
| | Reverse Grid Current Mutual Conductance Peak Anode Current | Rg1 = 500K max | 6.5 | | Ig1 | - | - | 3 | μA |
| | | Va = 7Kv Vg2 = 600V | 6.5 | | gm | 5.5 | - | 10 | mA/V |
| | | Vg1 = -160V NOTE 1 | 6.5 | | Ia_pk | 1.5 | | | |
| | Electrode Insulation | See Group A | 6.5 | | R | 50 | - | - | M |
| A IX /2.5 | GROUP G | | | | | | | | |
| | Electrical re-test after 28-day holding period | | | | | | | | |
| A VI /5.6 | Inoperatives Reverse grid current | Rg1 = 500K max. | 0.5 | 100% | Ig1 | - | - | 2.5 | μA |
| <u>NOTES</u> | | | | | | | | | |
| <p>1. Valve to be driven with 2μ second pulse at p.r.f. 1000 c.p.s. so that the grid voltage rises to 50V positive, (max) during pulse R.L. to be 2,200 ohms $\pm 5\%$.</p> <p>The load circuit should include some source inductance which together with the circuit damping should be chosen so that the peak pulse E.H.T. overshoot is equal to half the load pulse voltage. The E.H.T. storage capacity, fed from a high impedance supply, should be $0.05 \mu F$. Duration of test, 2 minutes. During the second minute the valve shall be sensibly free from flashing as shown by disturbance of the current waveform displayed on an oscilloscope.</p> <p>2. Tp 2 μsecs p.r.f. 50 c/s.</p> <p>3. Valves to be vibrated in each of the three required planes for not less than 30 hrs. and not less than 100 hrs. total. Heater switched 1 min. on 3 mins. off. No other voltages applied. Min peak acceleration = 5g. Frequency = 170 c/s.</p> <p>4. Va (b) = 250V Rk = 270 ohms. Vg2(b) = 250V Ck = 1000 μF. RL = 2 Kohms. Cc = 0.1 μF. Rg2 = 15 Kohms. g = 2.5</p> | | | | | | | | | |

NOTES cont'd

5. Pa approx 12 W
Pg² " 3.5 W
RL = 1600 ohms \pm 5%


6. Capacity connectiens.

| | HP | LP | E |
|-------|----|-------------|----------------|
| Cag 1 | TC | 5 | 2. 4. 7. 8. C. |
| C in | 5 | 2. 4. 7. 8. | TC. C. |
| C out | TC | 2. 4. 7. 8. | 5. C. |

DATA SHEET

VALVE
ELECTRONIC
TYPE

CV 4082

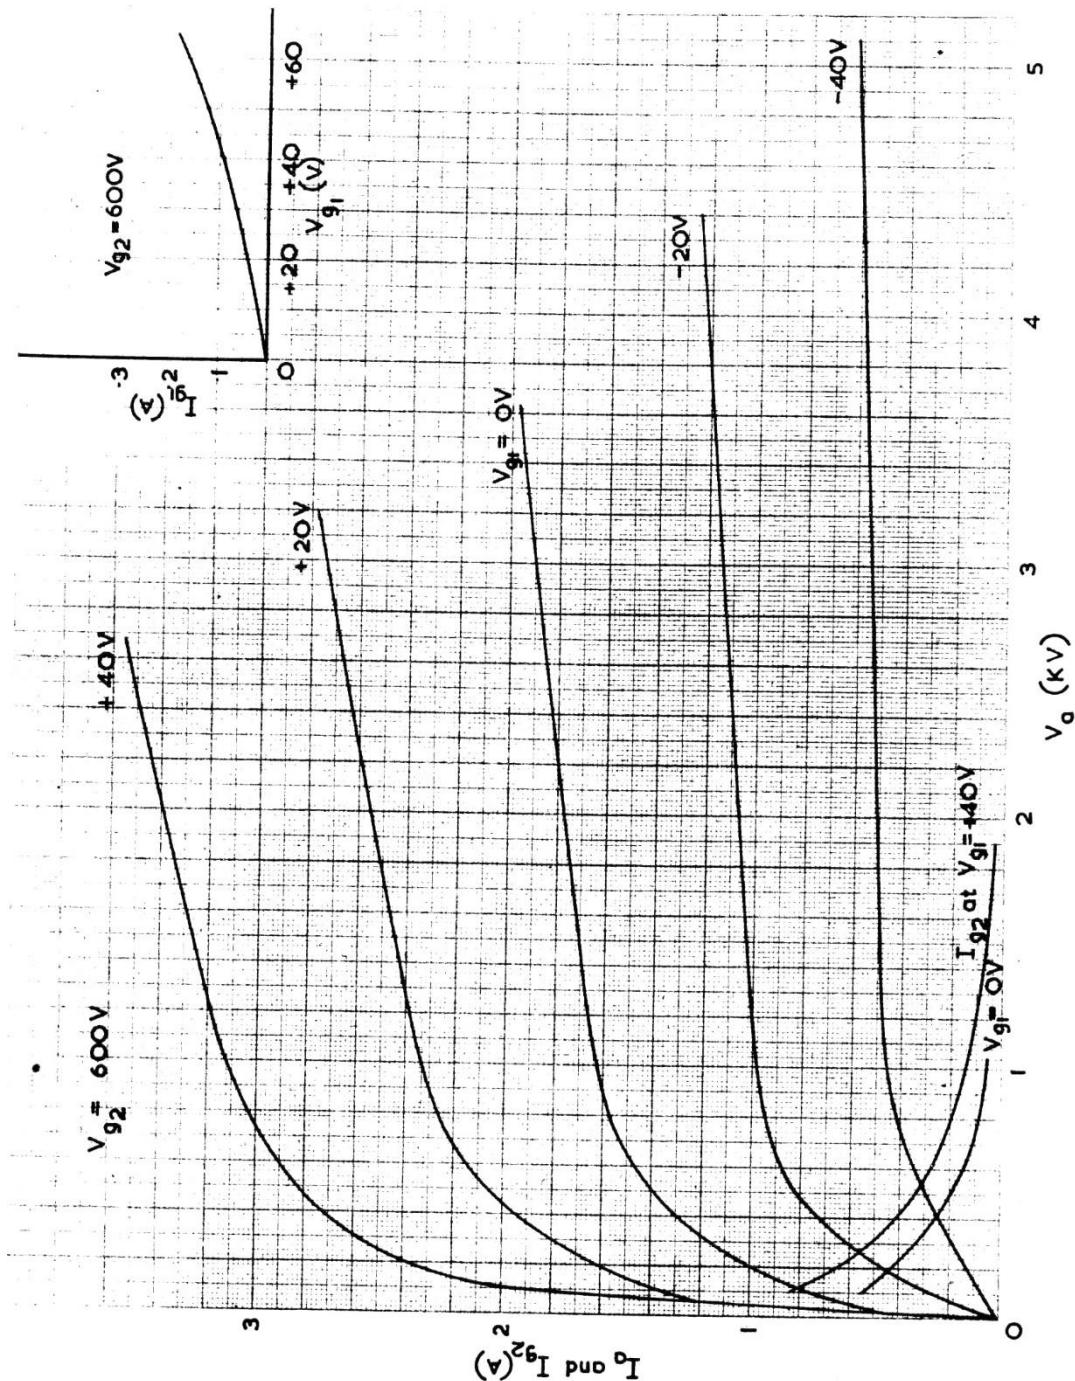

CV4082/d/14-5-58/3

DATA SHEET

VALVE
ELECTRONIC
TYPE

CV 4082

TRIODE CHARACTERISTICS