

Characteristics of OSRAM VALVES.


TYPE D.E.2.H.F.

DULL EMITTER.

H.F. and Detector Valve.

(For use with 2-volt accumulators).

ANODE CURRENT/GRID VOLTS CHARACTERISTIC.

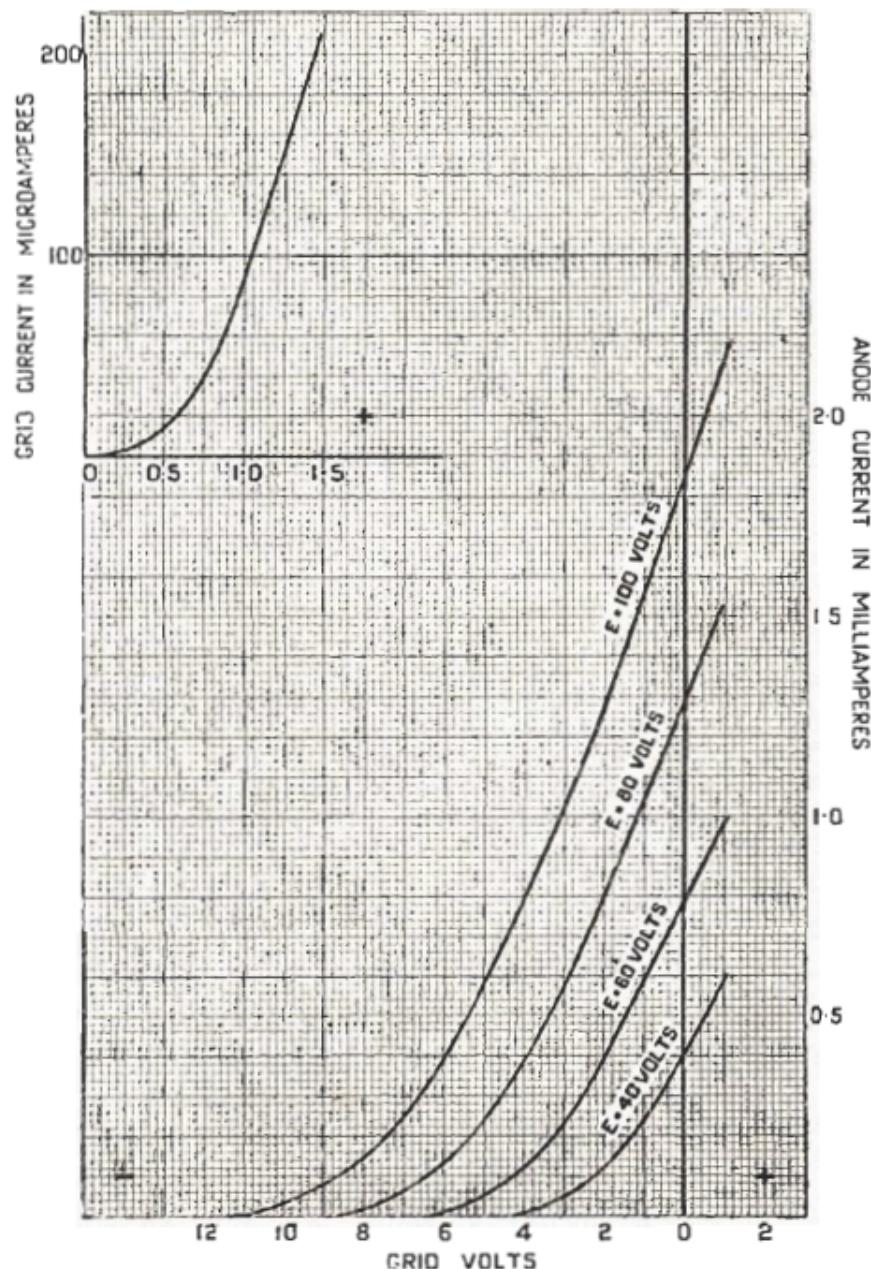

Filament Volts	1.8.
Filament Current	0.12 amps.
Anode Volts	40-100.
Impedance	45,000 ohms.
Amplification Factor	12.