

Type D0.25

DIRECTLY HEATED OUTPUT VALVE

Price 30/-

(In I.F.S. 33/-)

Application.


Output valve for powerful receivers and amplifiers.

Characteristics.

- *Anode Impedance 1,150 ohms
- *Amplification Factor 3
- *Mutual Conductance 2.6 mA./volt
- *At Anode Volts 100 ; Grid Volts, Zero.

Operating Data.

- Max. Filament Voltage 6.0 volts
- Filament Current 1.8 amps.
- Max. Anode Voltage 400 volts

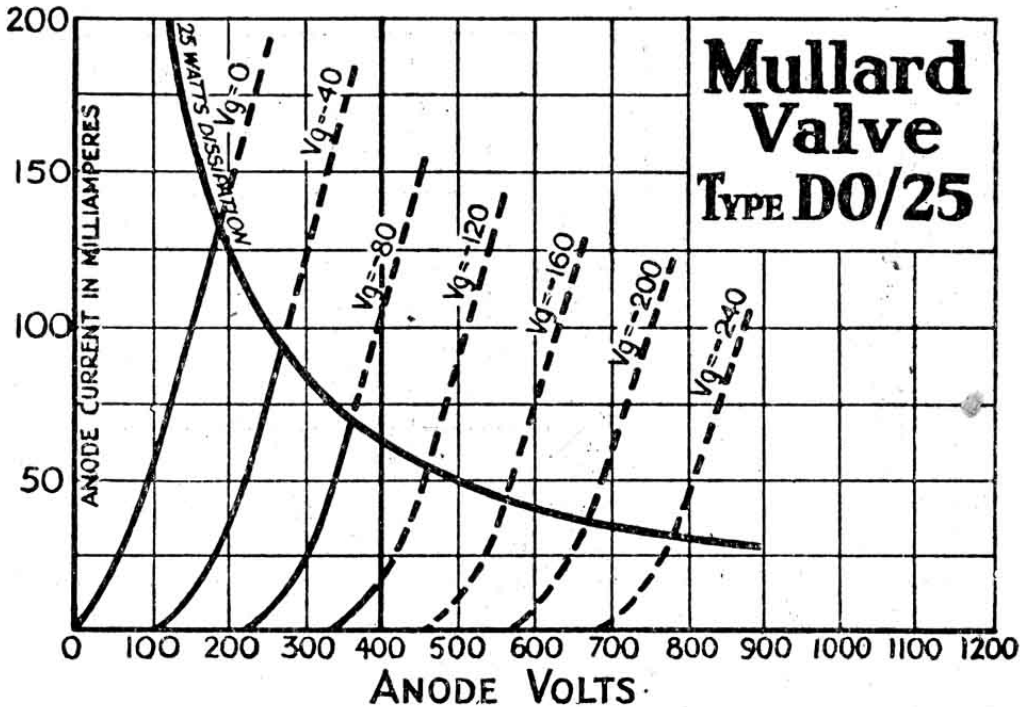

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
200	40.0	35.0
300	67.5	48.5
400	95.0	63.0

Mullard the Master Valve