


Type D.W.2

FULL WAVE RECTIFYING VALVE

Price 15/-
(In I.F.S. 16/6)


Application.

Full wave rectifier for use in H.T. supply units or battery charging equipments.

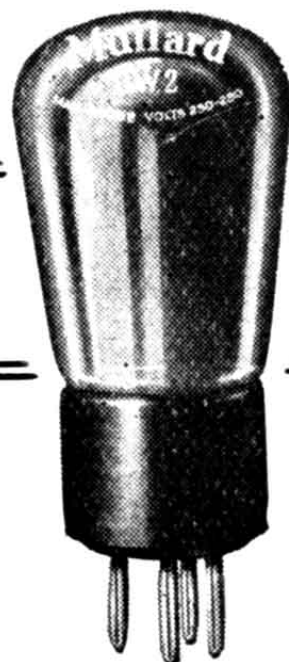

Operating Data.

Max. Filament Voltage 4.0 volts
Filament Current 1.0 amp.
Max. Anode Voltage 250-250 volts R.M.S.

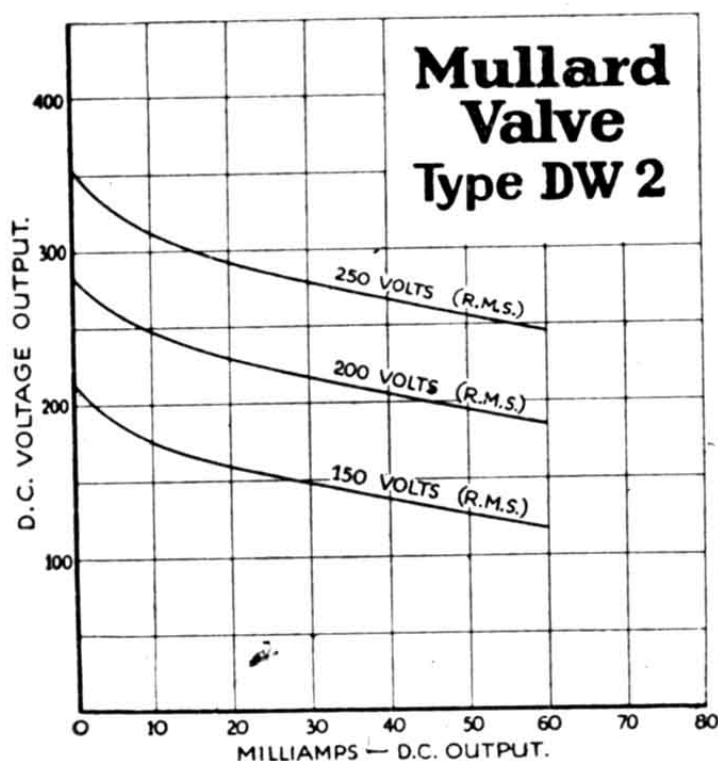

Output.

Max. Rectified Output 60 mA. D.C.

Mullard the Master Valve