

Mullard

DOUBLE OUTPUT PENTODE

KLL32

FILAMENT

V_f	2.0	V.
I_f	0.3	A.


CHARACTERISTICS

V_a	100	V.
V_{g2}	100	V.
V_{g1}	0	V.
ξ_m	2.6	mA/V.


TYPICAL OPERATING CONDITIONS

V_a	90	120	135	V.
V_{g2}	90	120	135	V.
I_{a0}	2.8	3.3	3.8	mA.
I_a (max. sig.)	9.8	14.4	16.9	mA.
V_{g1}	-7.4	-10.2	-11.3	V.
I_{g2} (max. sig.)	2.8	4.6	5.7	mA.
V_{in}	5.2	7.3	8.4	Vrms.
W_{out}	0.45	0.94	1.2	W.
D_{tot}	1.8	2.5	2.8	%
R_{a-s}	16,000	16,000	16,000	ohms.

DIMENSIONS.

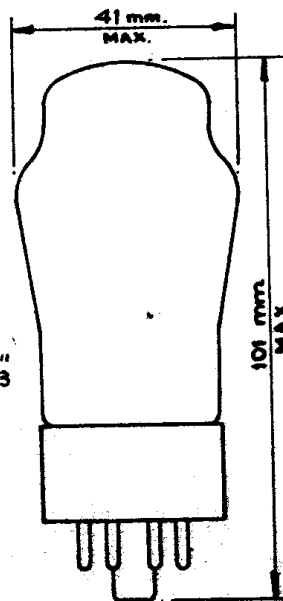

ARRANGEMENT OF ELECTRODES AND BASE CONNECTIONS.

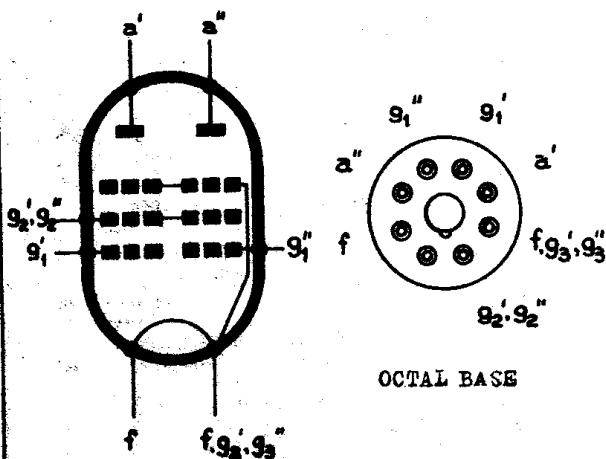

ISSUE 1

KLL32
1546/1