


Type P.M.1A.

HIGH IMPEDANCE VALVE

Price 8/6
(In I.F.S. 9/6)

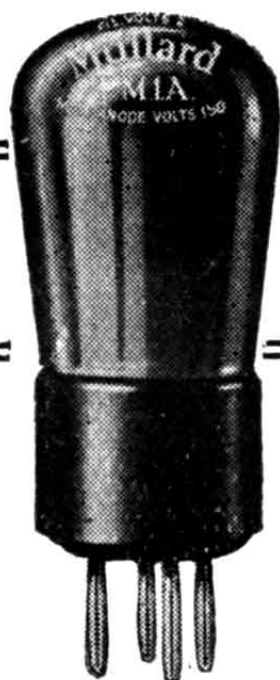

Application.


High frequency amplifier or detector followed by resistance - capacity coupling.

Operating Data.

Max. Filament Voltage
2.0 volts

Filament Current 0.1 amp.

Max. Anode Voltage
150 volts

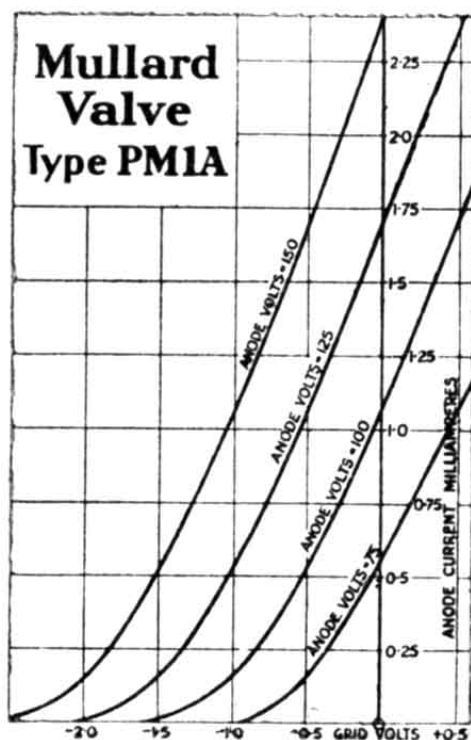

Characteristics.

*Anode Impedance	41,600 ohms
*Amplification Factor	50
*Mutual Conductance	1.2 mA./volt

*At Anode Volts 100 ; Grid Volts, Zero.

Mullard the Master Valve