

## Type P.M.1DG.

### DOUBLE GRID VALVE

Price 20/-


(In I.F.S. 22/-)

### Application.

Combined oscillator and first detector in super-heterodyne receivers.

### Operating Data.

Max. Filament Voltage	2.0 volts
Filament Current	0.1 amp.
Max. Anode Voltage	80 volts
Max. Auxiliary Grid Voltage	20 volts

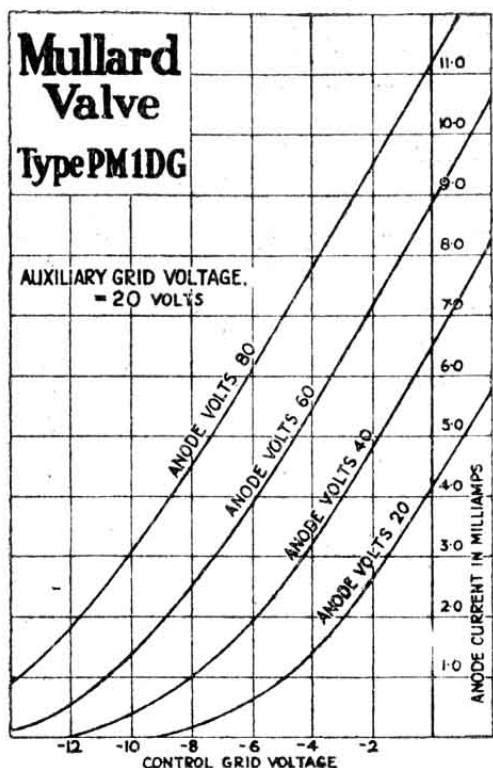

### Characteristics.

- \*Mutual Conductance .. .. 0.8 mA./volt
- \*At Anode Volts 20 ; Auxiliary Grid Volts 20 ; Control Grid Volts, Zero.

**Mullard the Master Valve**