



Type P.M.24A.

FIVE ELECTRODE OUTPUT VALVE

Price 25/-
(In I.F.S. 27/6)

Application.


Five electrode output valve (pentode).

Characteristics.

*Mutual Conductance 2.0 mA./volt
*At Anode Volts 100; Auxiliary Grid Volts 100; Control Grid Volts Zero.

Operating Data.

Max. Filament Voltage 4.0 volts
Filament Current 0.275 amp.
Max. Anode Voltage 300 volts
Max. Auxiliary Grid Voltage 200 volts

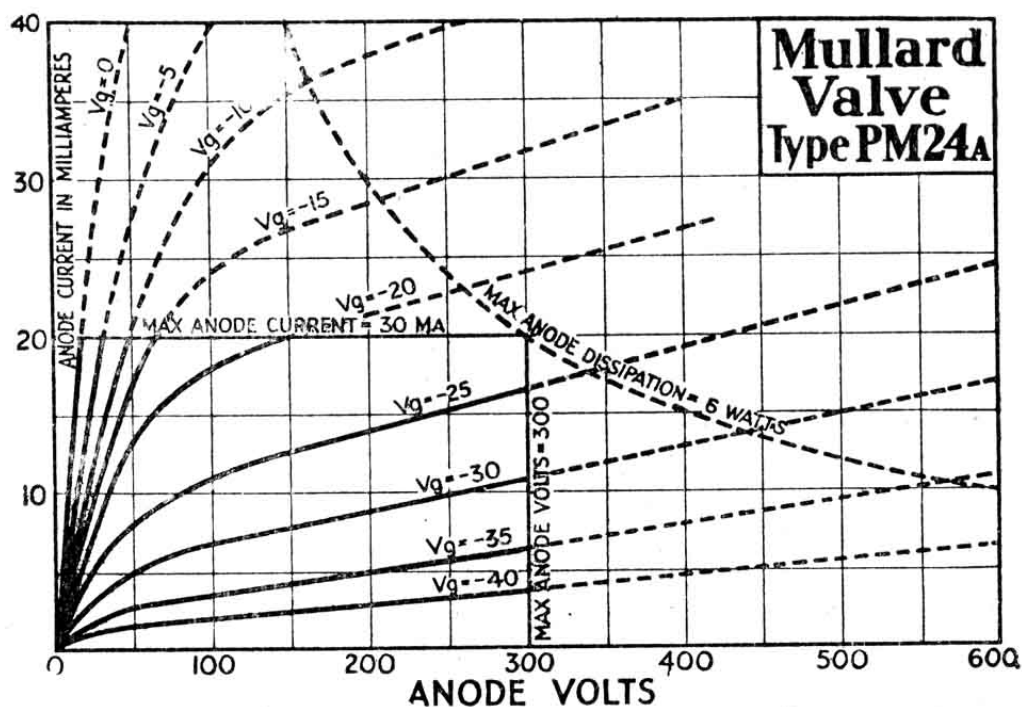

Grid Bias Table.

Auxiliary Grid Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	9.0	10.0
150	15.0	15.0
200	21.0	21.0

Mullard the Master Valve