

Type P.M.24B.

FIVE ELECTRODE OUTPUT VALVE

Price 27/6
(In I.F.S. 30/-)


Application.

Five electrode output valve
(Pentode).

Characteristics.


*Mutual Conductance
2.1 mA./volt

*At Anode Volts 100 ;
Auxiliary Grid Volts 100 ;
Control Grid Volts, Zero.

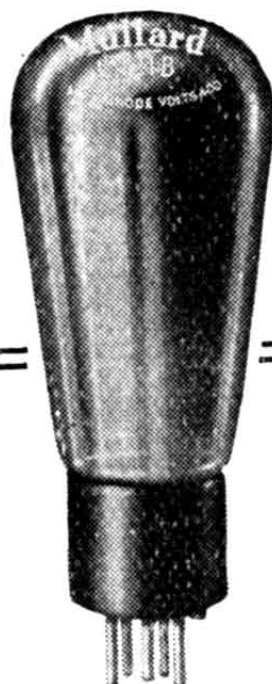

Operating Data.

Max. Filament Voltage 4.0 volts
Filament Current 1.0 amp.
Max. Anode Voltage 400 volts
Max. Auxiliary Grid Voltage 300 volts

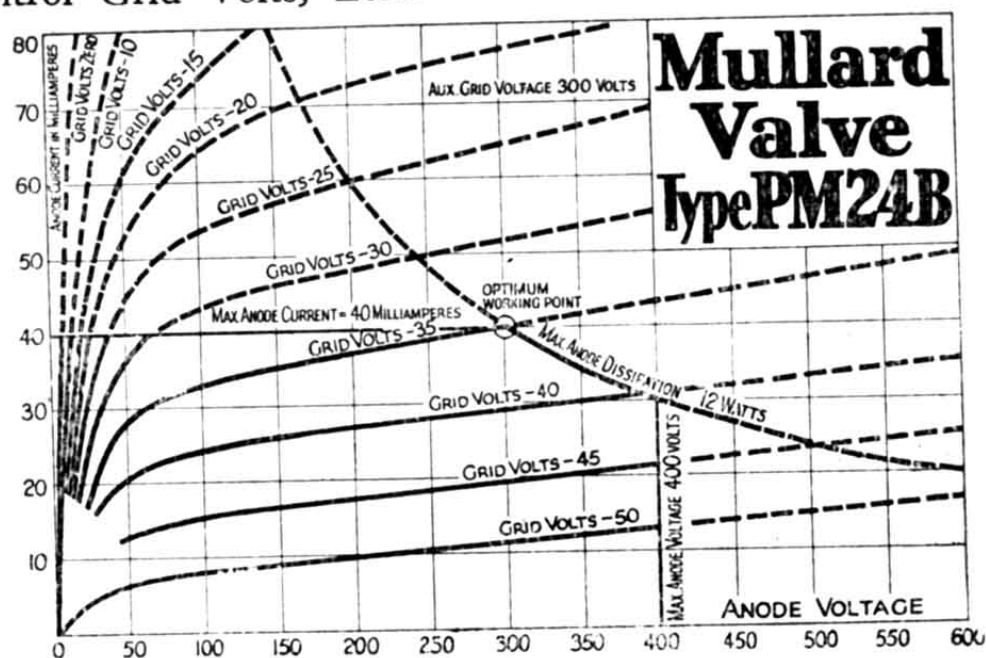

Grid Bias Table.

Auxiliary Grid Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
200	26.0	22.0
250	33.0	25.0
300 (At anode volts 300)	35.0	40.0
300 (At anode volts 400)	40.0	30.0

Mullard the Master Valve