

Type P.M.3

MEDIUM IMPEDANCE VALVE

Price 8/6
(In I.F.S. 9/6)

Application.


Detector or low frequency amplifier followed by transformer coupling.

Operating Data.

Max. Filament Voltage
4.0 volts
Filament Current
0.075 amp.
Max. Anode Voltage
150 volts

Characteristics.

*Anode Impedance
13,000 ohms
*Amplification Factor 14
*Mutual Conductance
1.05 mA./volt
*At Anode Volts 100; Grid
Volts, Zero.

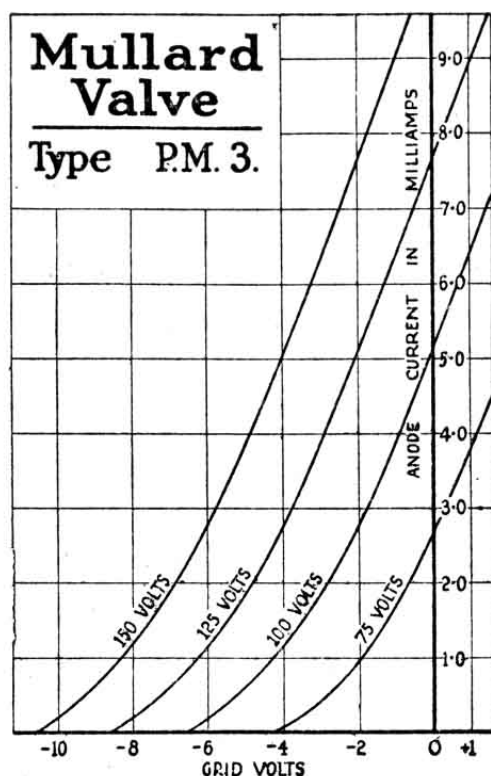

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
75	1.5	1.0
100	3.0	1.6
125	4.5	2.2
150	6.0	2.8

Mullard the Master Valve