


# Type P.M.6.

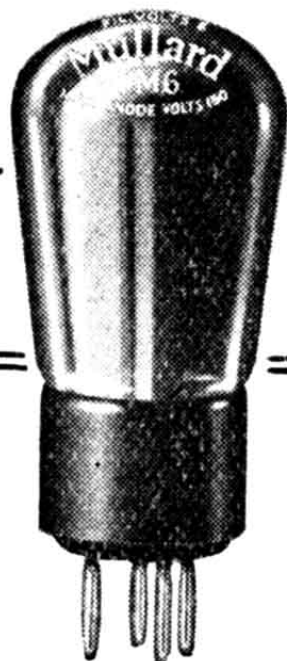

## POWER OUTPUT VALVE

Price 10/6  
(In I.F.S. 11/9)

### Application.


Small power output valve

### Characteristics.

- \*Anode Impedance 3,550 ohms
- \*Amplification Factor 8.0
- \*Mutual Conductance 2.25 mA./volt
- \*At Anode Volts 100 ; Grid Volts, Zero.

### Operating Data.

- Max. Filament Voltage 6.0 volts
- Filament Current 0.1 amp.
- Max. Anode Voltage 150 volts

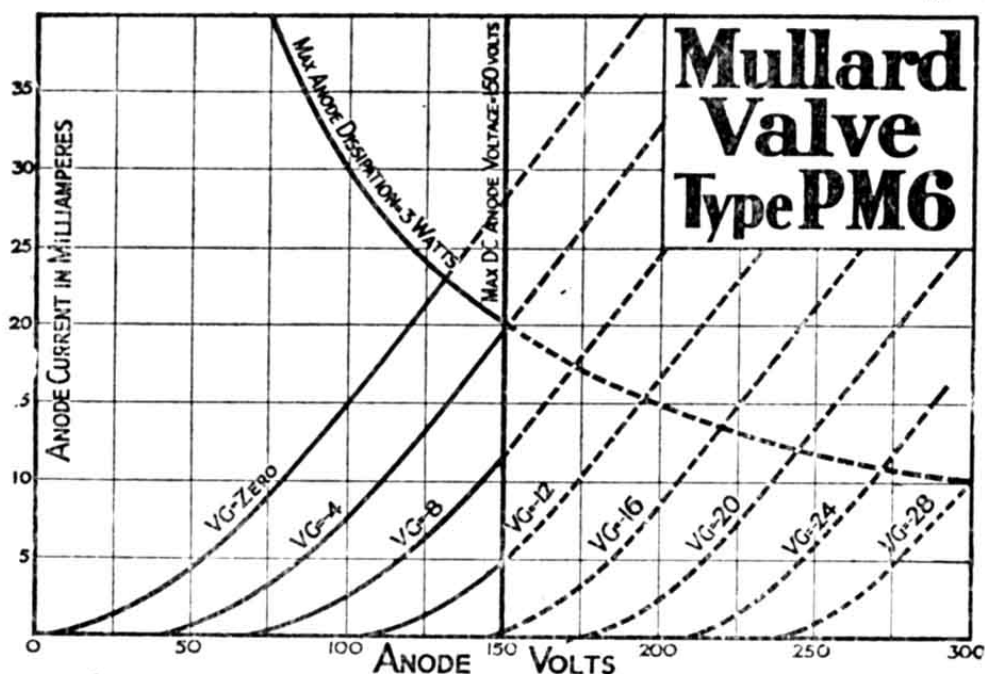

### Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
75	4.5	2.5
100	6.0	4.5
125	7.5	7.0
150	9.0	9.5

**Mullard the Master Valve**