



Type S.4V.B.

INDIRECTLY HEATED SCREENED GRID VALVE


Price 22/6
(In I.F.S. 24/9)

Application.

Screened-grid high frequency amplifying valve for A.C. all-mains receivers.

Operating Data.

Max. Heater Voltage
4.0 volts
Max. Heater Current
1.0 amp.
Max. Anode Voltage
200 volts
Positive Screen Voltage
75-100 volts

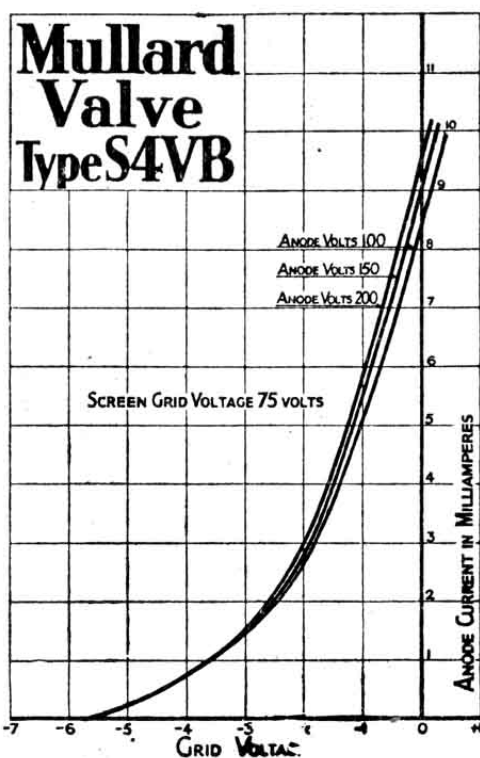

Characteristics.

*Anode Impedance 257,000 ohms
*Amplification Factor 900
*Mutual Conductance 3.5 mA./volt
*Anode Volts 100 ; Positive Screen Volts 75 ; Grid Volts -1

Mullard the Master Valve