


U 920

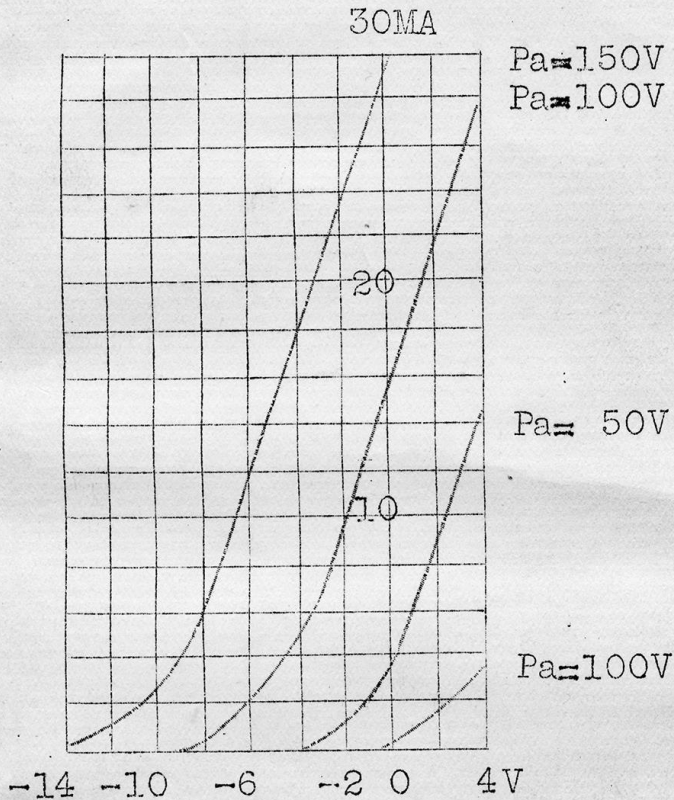

Amplification factor 11  
 Mutual conductance (max): 3 MA/V  
 Impedance: 3700Ω  
 Plate current: 5-8 MA  
 Maximum Overall Height 110 mm  
 Maximum " Diameter 50 mm  
 Plate Voltage: 100 150  
 Negative Grid Voltage: 3-4, 7-9,  
 200  
 12-14

U 920 is a general purpose valve which can be used as high-frequency valve audiovalve or low frequency valve especially where it is a question of dealing with big capacities. It is also suitable as intermediate frequency valve and oscillator valve with beat or super receivers. As last-stage valve for small receiving sets with normal output the valve gives extraordinarily high amplification.

In connecting to the mains the safety regulations are to be observed.