


VARIABLE-MU H.F. PENTODE



V.P.4B

OPERATING DATA.

Heater Voltage	4.0 V.
Heater Current	0.65 A.
Max. Anode Voltage	250 V.
Max. Aux. Grid Voltage	250 V.

CHARACTERISTICS.

At Auxiliary Grid Volts 250; Anode Volts 250; Grid Volts Zero.

Mutual Conductance 3.5 mA/V.

APPLICATION.


Radio frequency or intermediate frequency Amplifier in circuits arranged for volume control by variation of grid bias.

BASE.

Standard 7-pin. For connections see page 110.

BULB FINISH.

This valve is supplied with metallised bulb only.

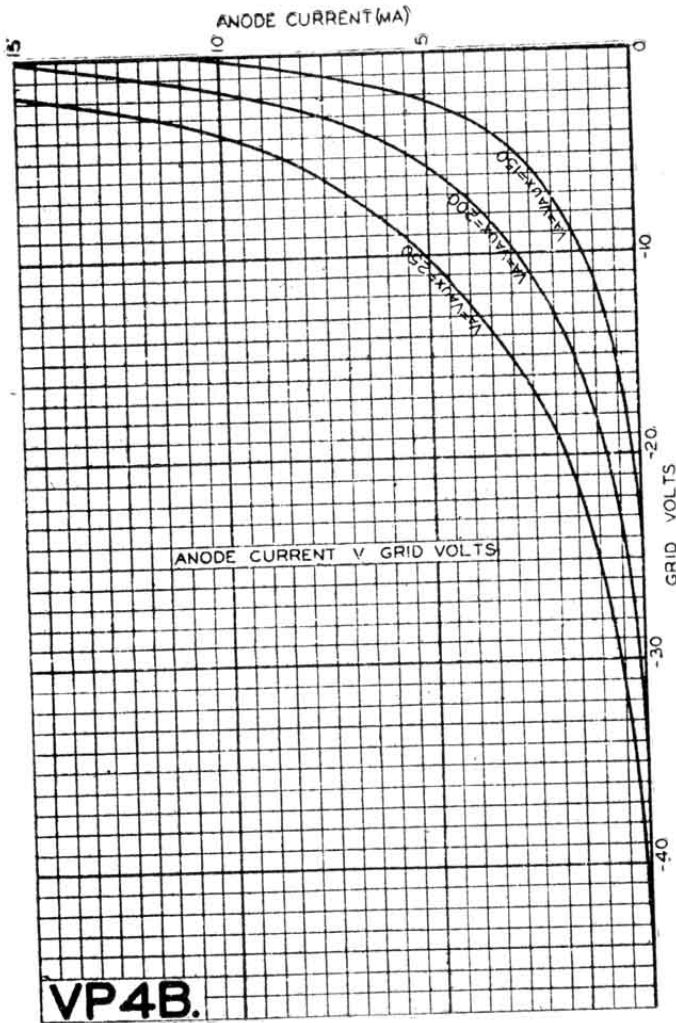

PRICE 12/6