


Characteristics of OSRAM VALVES. TYPE D.E.2.L.F.

DULL EMITTER.

Detector and L.F. Amplifying Valve.
(For use with 2-volt Accumulators).

ANODE CURRENT/GRID VOLTS CHARACTERISTIC.

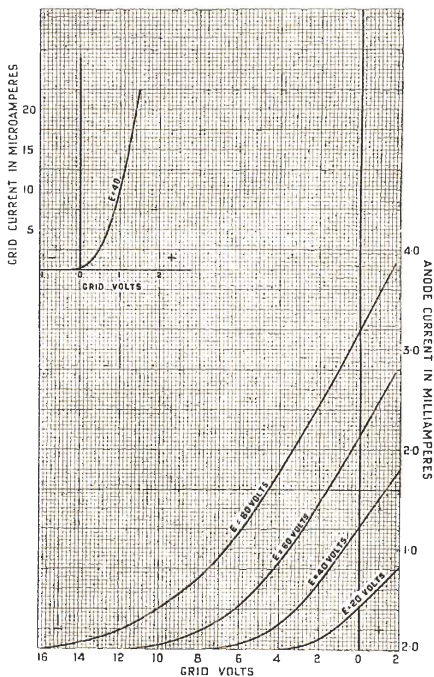

Filament Volts	1.8.
Filament Current	0.12 amps.
Anode Volts	20-80.
Impedance	22,000 ohms.
Amplification Factor	7.