



Type P.M.16

SCREENED GRID VALVE

Price 20/-
(In I.F.S. 22/-)

Application.

Screened-grid high-frequency amplifying stages.


Operating Data.

Max. Filament Voltage
6.0 volts

Filament Current
0.075 amp.

Max. Anode Voltage
150 volts

Positive Screen Voltage
75 volts

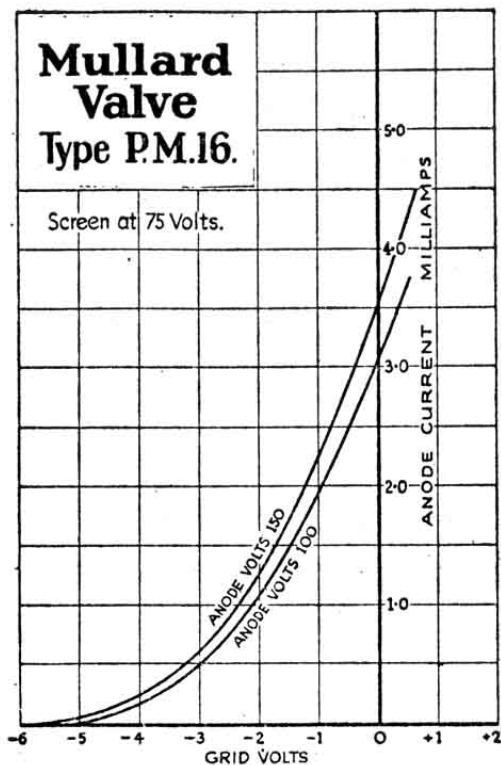

Characteristics.

- *Anode Impedance 200,000 ohms
 - *Amplification Factor 200
 - *Mutual Conductance 1.0 mA./volt
- *At Anode Volts 100; Positive Screen Volts 75; Grid Volts, Zero.

Mullard the Master Valve