


Type P.M.2A.

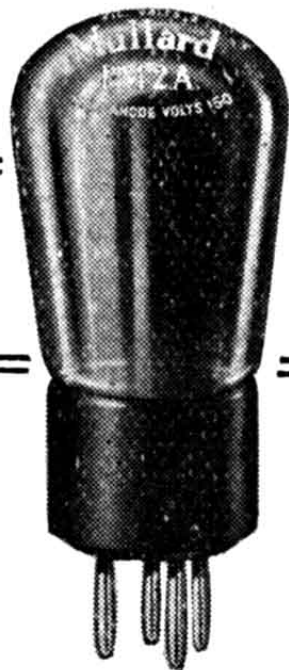

“POWER” OUTPUT VALVE

Price 10/6
(In I.F.S. 11/9)

Application.


Small power output valve

Characteristics.

- *Anode Impedance 3,600 ohms
- *Amplification Factor 12.5
- *Mutual Conductance 3.5 mA./volt
- *At Anode Volts 100 ; Grid Volt, Zero.

Operating Data.

- Max. Filament Voltage 2.0 volts
- Filament Current 0.2 amp.
- Max. Anode Voltage 150 volts

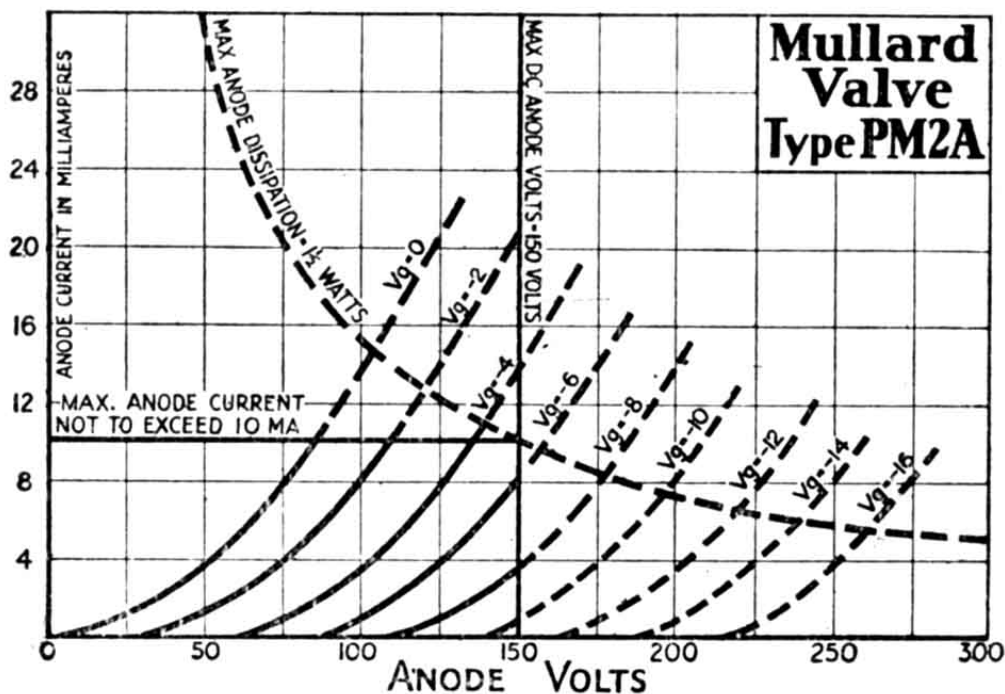

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
100	3.0	5.0
125	4.5	6.5
150	6.0	8.0

Mullard the Master Valve