

Type P.M.6D.

SUPER DETECTOR VALVE

Price 8/6
(In I.F.S. 9/6)

Application.


Detector or low frequency amplifier followed by transformer coupling.

Operating Data.

Max. Filament Voltage 6.0 volts
Filament Current 0.1 amp.
Max. Anode Voltage 150 volts

Characteristics.

- *Anode Impedance 9,000 ohms
- *Amplification Factor 18
- *Mutual Conductance 2.0 mA./volt
- *At Anode Volts 100; Grid Volts, Zero.

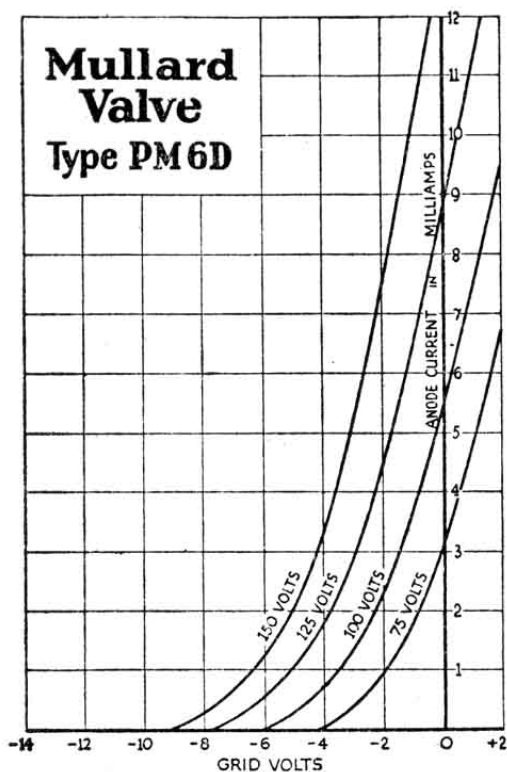

Grid Bias Table.

Anode Voltage.	Approx. Neg. Grid Bias Voltage.	Approx. Anode Current (mA).
75	0 to 1.5	1.0
100	1.5 to 3	1.5
125	3.0 to 4.5	2.0
150	4.5	2.5

Mullard the Master Valve